Supporting information

A methodologic approach for the selection of bio-resorbable polymers in the development of medical devices: the case of poly(L-lactide-co-ε-caprolactone)

Alberto Cingolani [1,2], Tommaso Casalini [1,3], Stefano Caimi [1], Antoine Klaue [1], Mattia Sponchioni [4], Filippo Rossi [4,*] and Giuseppe Perale [1,3,*]

[1] Institute for Chemical and Bioengineering, Department of Chemistry and Applied Bioscience ETH Zurich, Vladimir-Prelog-Weg 1-5/10, 8093 Zürich, Switzerland; A.C. alberto.cingolani@chem.ethz.ch; T.C. tommaso.casalini@chem.ethz.ch; S.C. stefano.caimi@chem.ethz.ch; A.K. antoine.klaue@chem.ethz.ch.
[2] Industrie Biomediche Insubri SA (IBI), Via Cantonale 67, 6805 Mezzovico-Vira, Switzerland
[3] Biomaterials Laboratory, Institute for Mechanical Engineering and Materials Technology, SUPSI – University of Applied Sciences and Arts of Southern Switzerland. Via Cantonale 2C, Galleria 2, 6928 Manno, Switzerland; G.P. giuseppe.perale@supsi.ch;
[4] Department of Chemistry, Materials and Chemical Engineering "G. Natta", Politecnico di Milano, 20100 Milan, Italy; M.S. mattia.sponchioni@polimi.it; F.R. filippo.rossi@polimi.it.
- Correspondence: filippo.rossi@polimi.it; Tel: +39 02-2399-3145
giuseppe.perale@supsi.ch; Tel.: +41-58-666-66-41

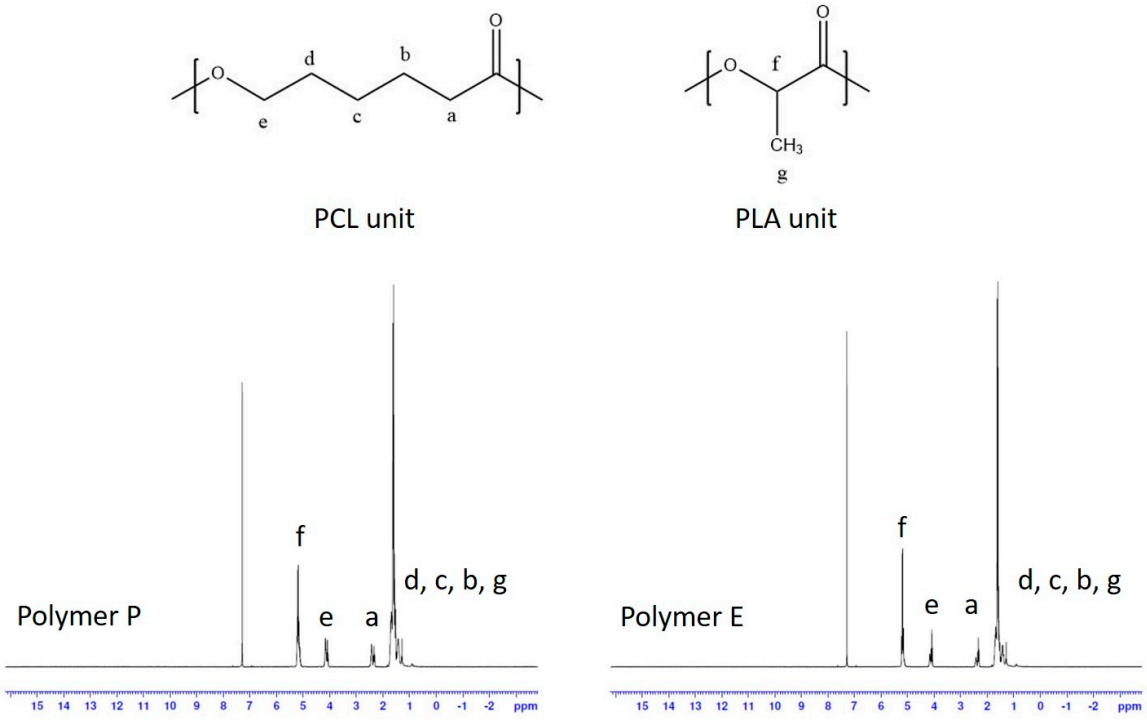

Figure S1. NMR spectra of P and E samples.

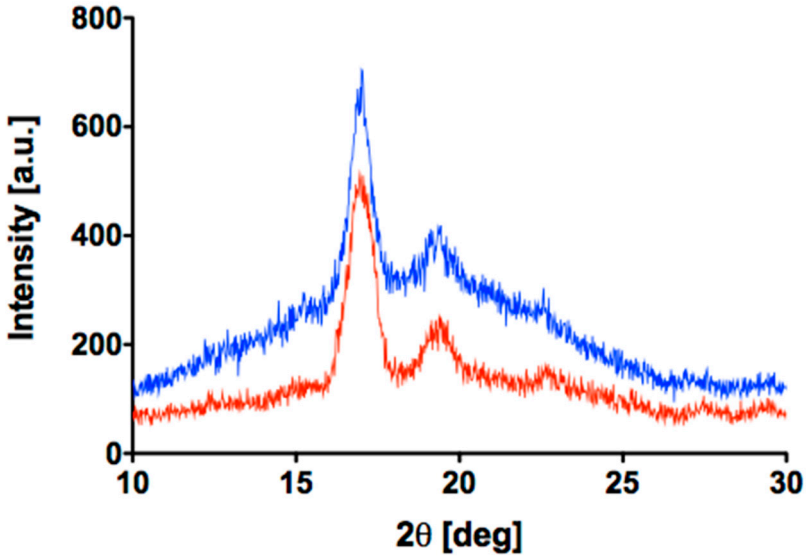

Figure S2. XRD spectra of P (blue line) and E (red line).

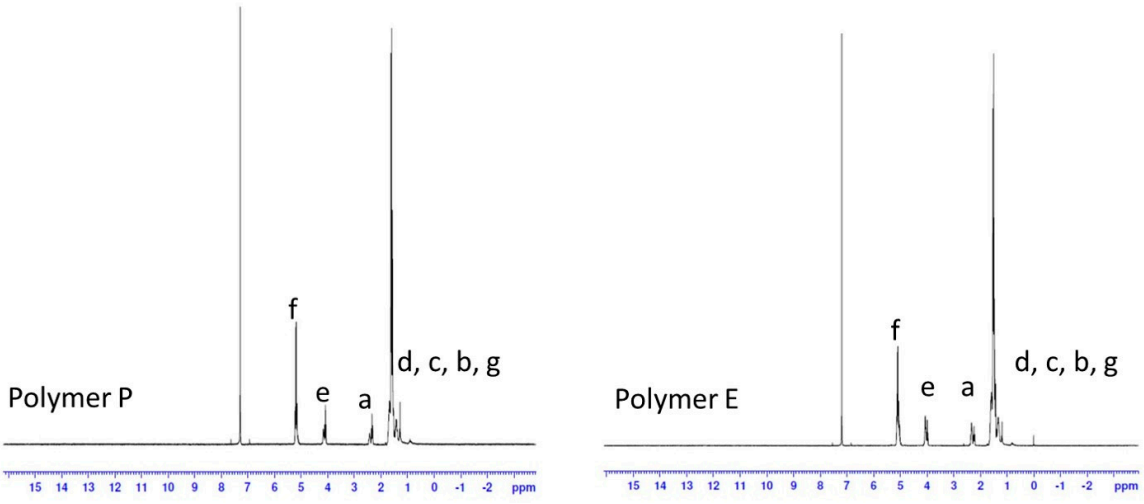

Figure S3. NMR spectra of P and E after EtO.

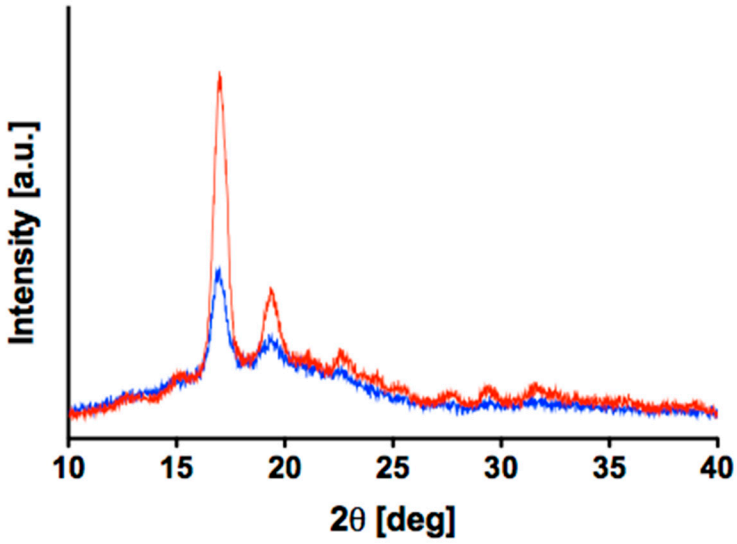

Figure S4. XRD spectra of P (blue line) and E (red line) after EtO.

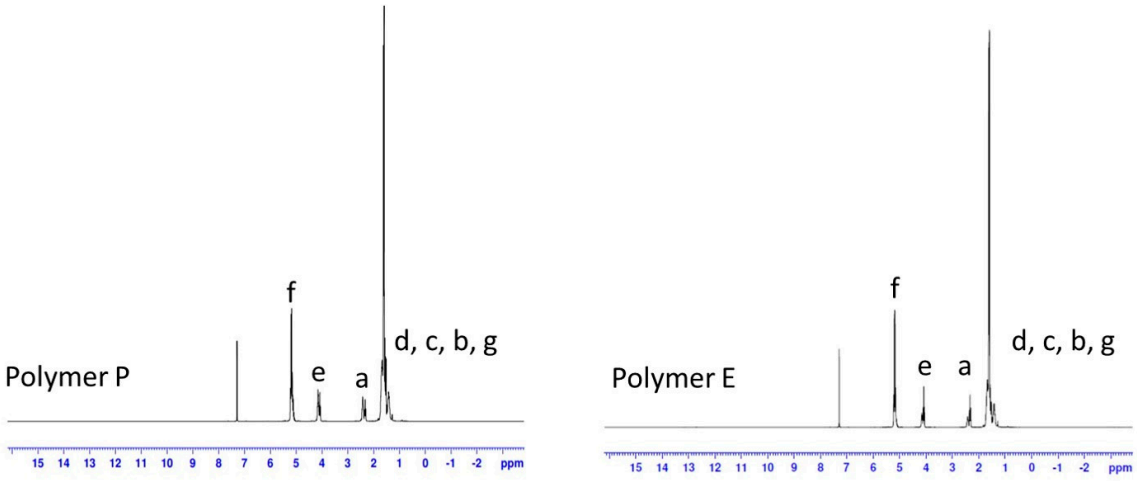

Figure S5. NMR spectra of P and E after electron beam irradiation.

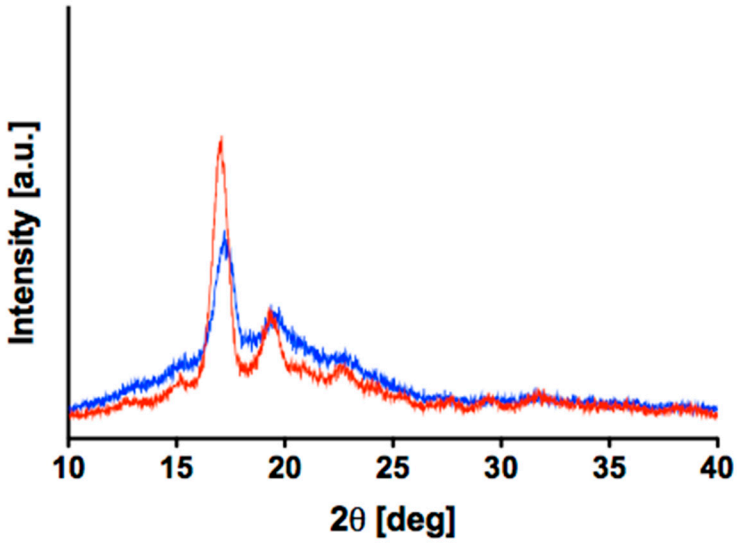

38

39 **Figure S6**. XRD spectra of P and E after electron beam irradiation.