

Article

Not peer-reviewed version

Senior Drivers' Body Movement Strategies for Getting in and Out of Cars: A Study by Vehicle Typology

[Susana C. F. Fernandes](#)*

Posted Date: 19 July 2023

doi: 10.20944/preprints202307.1293.v1

Keywords: ergonomics; senior drivers; ingress; entry; egress; exit; somatic movement; biomechanics of the movement; movement strategies; car design.



Preprints.org is a free multidiscipline platform providing preprint service that is dedicated to making early versions of research outputs permanently available and citable. Preprints posted at Preprints.org appear in Web of Science, Crossref, Google Scholar, Scilit, Europe PMC.

Copyright: This is an open access article distributed under the Creative Commons Attribution License which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

Article

Senior Drivers' Body Movement Strategies for Getting in and out of Cars: A Study by Vehicle Typology

Susana C. F. Fernandes ^{1,2,*}

¹ N2i, Núcleo de Investigação do Instituto Superior da Maia, Avenida Carlos de Oliveira Campos - Castelo da Maia, 4475-690 Maia; sfernandes@umaia.pt

² ISEP, Instituto Superior de Engenharia do Porto, Rua Dr. António Bernardino de Almeida, 4249-015 Porto, Portugal; scf@isep.ipp.pt

* Correspondence: sfernandes@umaia.pt

Abstract: During normal ageing, physical changes take place, namely in terms of the biomechanical, musculo-skeletal, and psychomotor systems, that reduce strength, flexibility, motor coordination, balance, and precision of movements. This article analyses the motion behaviour of a sample of 49 senior and pre-senior subjects during the process of entry to (ingress) and exit from (egress) new car models not experienced before, obtained over five days at the Geneva International Motor Show. The methodological process is based on visual studies using photography and video to analyse motion behaviour. This investigation identifies five entry movement strategies and three exit movement strategies in three types of vehicle groups. The movements adopted in the egress of the vehicle were more complex and difficult, in general, than those observed for ingress, requiring greater flexibility, agility/dexterity, and physical strength of subjects, involving more contact or support with vehicle parts. The main factor that influences movement strategies is essentially related to subjects' levels of physical capacity and previous experiences. In conclusion, there are no significant changes in the subjects' somatic movement strategies based on vehicle types.

Keywords: ergonomics; senior drivers; ingress; entry; egress; exit; somatic movement; biomechanics of the movement; movement strategies; car design

1. Introduction

Many senior drivers begin to experience physical limitations long before they lose their driving skills. Decreased strength, balance, and flexibility, for example, lead to some subjects experiencing an increased challenge, such as getting in and out of vehicles [1,2]. As people age, there are obvious physical changes, namely at the psychomotor level and the biomechanical level of the musculoskeletal system, which are the origin of decreases in strength, motor coordination, balance, and precision of body movements [3–6].

The National Center for Injury Prevention and Control (part of the Centers for Disease Control and Prevention) in Atlanta estimates that, annually, in the United States of America (USA) alone, about 37,000 seniors suffer injuries when entering or leaving vehicles; 40% of these injuries are due to falls. People aged 65 and over are 10 times more likely to be hospitalized for injuries sustained while getting in and out of cars than younger people, and women are significantly more likely to be hospitalized. The probability of the injury occurring while exiting the vehicle is more than twice that of while entering [7].

Considering that the senior population is increasing worldwide [8] and that there is a high number of older drivers qualified to drive [9], improving the experience of getting in and out of a car is a challenge for designers, planners, and engineers who are exploring solutions that improve automotive design, adjusting it to the limitations arising from the natural ageing process of users [10,11].

Entering and exiting a car are complex, multisensory experiences involving coordination, balance, and body movement. These somatic movements are usually performed without premeditation,

and the body, through the psychosomatic experience, ends up adapting to the envelope and shape of the car [12]. The somatic movements associated with the process of getting in and out of a car—bending, twisting, stretching, and tipping—create high biomechanical stresses [13,14]. Several aspects of psychomotor functioning decline with increasing age. Deficits in psychomotor functioning increase the difficulty in controlling movement when sitting down and standing up, as well as the difficulty in maintaining balance whenever the positioning of the trunk weight is varied. Some cognitive slowdowns, joint stiffness, and muscle weakness decrease reaction time and induce slower biomechanical movements [15]. Leg stiffness originates from states of imbalance in terms of body positioning [15].

Previous investigations [16,17] reveal that the experience of entering and leaving represents the initial interactions that the customer has with the vehicle and, therefore, constitutes a fundamental influence on the purchase decision. Car usability for the entry and exit process also requires particular attention, as the number of drivers who report discomfort in cars is still significant. Other authors [8,18] also add that minimizing the requirements and stress patterns arising from usability in the vehicle entry and exit process improves customer satisfaction.

In the past, car manufacturers conducted surveys to assess customer satisfaction regarding the entry and exit process of their car models. These questionnaires had the clear objective of assessing opinions about the ease of the entry/exit movements for their target audience, with a view to improving the development of future vehicles [19,20]. The answers obtained indicated a need to develop prototypes or physical models, on a real scale, with the purpose of testing the entry and exit movements required for the car. Using these evaluation methods (with questionnaire and prototype construction), the results suggested, for the most part, limitations correlated with the dimensions of the vehicles [21]. However, the high costs associated with the construction of non-reusable prototypes, the high number of individuals needed to carry out the studies (for the sample to be representative), and the subsequent data analysis make this practice costly and not applicable right now [22]. Currently, car manufacturers focus on delimiting any problems related to a car's entry/exit process, even during the design phase [23]. The evaluation of accessibility movements required to enter and exit a car is carried out, essentially, through simultaneous engineering, with evaluation methods that use numerical mannequins, which help to significantly reduce costs and production delays [24]. Numerical dummies provide virtual models of the human user, capable of representing and even predicting their behaviour (user interaction with physical interfaces and the environment). The use of these models makes it possible to analyse and evaluate automotive ergonomics and, in this way, deduce the necessary requirements for the user [25]. However, the movement strategies adopted in the simulator are restricted and do not allow to cover the universe of possible users [26].

To better understand human behaviour, it is important to carry out detailed ergonomic analyses and/or anthropological studies and, only afterwards, simulate human movement. Research on the movement strategies adopted by users is an essential first step towards an accurate simulation [23,26]. The procedures used to determine movement strategies can be divided into two categories: (i) qualitative procedures based on observation and (ii) quantitative procedures based on automatic calculations [19].

Constant technological improvements increase the potential of virtual reality techniques in computer simulation programs used by the automotive industry [24,27,28]. Interactive simulated environments can be created using virtual reality techniques, which allows a quick assessment of the usability of the various project alternatives. This technology is particularly promising in anticipating and solving problems that are being considered in the design phase. The great difficulty is the correct integration of the virtual simulation in the design phase [29]. Several researchers [25,27,28,30] suggest, as the most recommended methodology, the use of motion capture from optoelectronic systems with passive markers to measure the somatic movements of automobile accessibility. Although optoelectronic systems may have some instrumental and experimental errors, they are still among the most suitable systems for the study of complex motions.

The analysis of accessibility movements associated with a car also includes quantification and classification of the movements by strategies with the aim of refining the results of the analysis of the

identified motor strategies to, thus, faithfully simulate the movement [31]. Some studies of car accessibility have considered all entry and exit movements [32,33]. Others have their scope limited to either entry [34–36] or exit [28]. Some studies analyse movement strategies through the complete study of the human body, while others are focused on specific parts of the human body, namely, the head [2,21,37] and the trunk [37]. Other studies highlight the influence of some parts of the vehicle on car accessibility movements, such as the door sill [38], seat height [39], and roof height [21,38].

In this study area related to the somatic process of getting in and out of the car, investigations based on observational methodologies have proven very useful in increasing the understanding of human behaviour. However, the observation procedures do not provide accurate results, as they have a shortcoming in the lack of numerical reference marks essential to quantify and/or measure what is observed. Thus, research methods based on observation require great experience and knowledge to implement measures that effectively mitigate the observed results [19,31].

2. Materials and Methods

The research methodology is the visual method of qualitative analysis. The study uses local observation of seniors getting in and out of new car models. This observation is complemented by video and photographic recordings for further analysis and treatment of the collected data. The study is based on the premise that the subjects in the study did not know that they were being observed, which was a way of guaranteeing that the movements were processed in a natural and spontaneous way, with subsequent informed consent to participate in this study.

The location chosen for the investigation was the Geneva International Motor Show (GIMS) in Switzerland, an event that sets trends in the automotive sector and features numerous global car manufacturers exhibiting their vehicles, some of which will define the trends of future generations of vehicles. The study took place in pavilions 1, 2, 4, 5, and 6 over five consecutive days and lasted nine hours per day. The subjects studied were predominantly male (the major participants among the visiting public), with an estimated age of over 50 years. Records of couples (man and woman) trying to get in and out of vehicles with alternating positions were also obtained.

Despite the high number of records, only 49 subjects were included in the study because of the strict sample selection criteria and the informed consent requirement. Thus, for the study's purposes, selection criteria were validated samples of subjects with variable anthropomorphology in three groups of vehicle typologies—each group containing three types of vehicles with variable dimensions and geometries, with steering wheel on the left—but homogeneous in characteristics. It should be noted that this study is not focused on vehicle brands but on vehicle typologies. So, vehicle manufacturers and brands will not be disclosed for ethical reasons and confidentiality. The adopted methodology can be described in five steps:

Step 1: Identification of the places with the greatest affluence and car experimentation by subjects of more advanced ages (sample of the relevant population to be studied).

Step 2: Observation of the strategies adopted in the somatic movement of entering the car, depending on the user's physical capabilities (prevalence level of disabling conditions), passenger compartment area/space, and access position, as well as the shape and layout of the physical interfaces.

Step 3: Identification of the points of contact (physical interfaces with the driver) when entering the car and assessment of the effort or discomfort perceived by the user.

Step 4: Observation of the somatic movement strategies adopted when exiting the car, depending on the perceived user's physical abilities, areas/spaces in the passenger compartment, and access positions, as well as the shape and layout of the physical interfaces of the car.

Step 5: Identification of points of contact, that is, the physical interfaces between the vehicle and the driver, when exiting the car and assessing the level of effort or discomfort perceived by the user.

That research presents some scope limitations. It is not extended to some car models classified as belonging to the classes considered "top of the range", "very luxury", and/or "super sports cars", because they were contained in some of the pavilion's sectors 1, 5, and 6 with restricted access to the general public.

The collection of visual records was not uniform over the five days of the experience during which the fieldwork took place since the influx of visitors to the exhibition hall occurred in different ways. Thus, in the last two days (weekend), we had difficulties collecting valid images as well as collecting participation informed consent due to the greater influx of visitors.

As pre-screening criteria of images (video) by filming technique, only records in which the entry/exit movements were fully observed in any type of vehicle, without external interference (or overlapping of images with other subjects not the object of study), were considered valid. This procedure reduced the valid sample to a group of 33 subjects. However, subsequent records analysis collected using the filming technique allowed us to extend to 49 the number of subjects in the sample. We included subjects whose video records were interfered with in the filming field by other visitors who did not impact on analysis and understanding of the somatic movement strategies to enter/exit vehicles. Therefore, all visual records that met the following characteristics were considered valid:










- (i) Subjects captured by the filming technique, with complete records of entry and/or exit movement, in any type of motor vehicle class, admitting small interferences (overlaps of the object of study of less than one-third of the total of the collected image—such as hands, arms, feet, and legs of other subjects (if they did not compromise interpretation of somatic movement strategies)).
- (ii) Subjects entering and exiting the car through the front area, that is, the area accessible from the driver's cabin.

The study is heterogeneous because it considers a universe of 49 subjects comprising 47 men and 2 women with different levels of physical development for their ages. It should be noted that women were more frequently observed trying out the front occupant seat instead of the driver seat. The few records that were made of senior women getting in and out of a driver's seat at the exhibition contained interferences in the filming fields by other subjects (men).

The types of vehicles were divided into three groups (**Table 1**): T1, T2, and T3 because the vehicles' dimensions are relatively homogeneous within each respective group. The Typology 1 (T1) group includes vehicle types city, utility, and sedan. The Typology 2 (T2) group includes vehicle types van, minivan, and SUV/TT. The Typology 3 (T3) group includes vehicle types luxury, sports/coupé, and cabrio.

The subjects were labeled S1 to S49. The level of experimentation of the groups and types of vehicles was not homogeneous. In the Typology 1 (T1) group, 20 records were validated, of which 9 were observed in utility vehicles and 11 in sedans. In urban vehicles, no valid records were obtained, with a level of experimentation being mostly carried out by young adults. **Figure 1** identifies the 20 subjects (S1 to S20) studied in the T1 vehicle typology (which groups utility and sedan models). In the Typology 2 (T2) group, 20 valid records were obtained, of which 4 were obtained in minivans and 16 in SUVs/TTs. In van-type vehicles, valid registrations were not obtained. **Figure 2** identifies the 20 subjects (S21 to S40) studied in the T2 vehicle typology (which groups the minivan and SUV/TT models). Finally, in the Typology 3 (T3) group, 9 valid registrations were obtained, of which 2 were in sports/coupé vehicles and 7 were in cabrio vehicles. No registrations were obtained for vehicles of the luxury segment due to limited access to the respective exhibition/experimentation areas. **Figure 3** identifies the 9 subjects (S41 to S49) studied in the T3 vehicle typology (which groups the sports/coupé and the cabrio). Therefore, the visual studies carried out focus mainly on the analyses of the somatic movements of senior subjects in/out of SUV/TT vehicles (33%), followed by sedan (22%), utility (18%), and convertible vehicles (14%). The remaining vehicles have residual expressiveness (minivan, 8%; sports/coupé, 4%)—**Figure 4**.

Table 1. Vehicles typology classification adopted in this study.

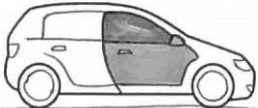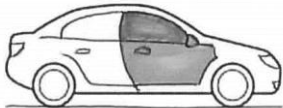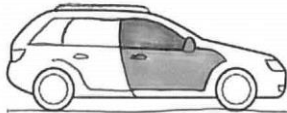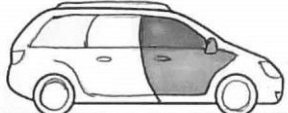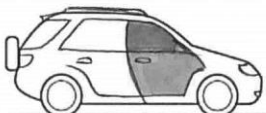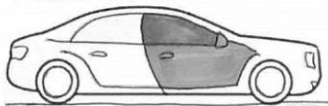		
Urban	Utility	Sedan
Vehicle types were grouped into one category – T1		
Subjects studied:		
x	S1; S3; S4; S8; S11; S13; S15; S18; S20	S2; S5; S6; S7; S9; S10; S12; S14; S16; S17; S19
		
Van	Minivan	SUV/TT
Vehicle types were grouped into one category – T2		
Subjects studied:		
x	S32; S33; S37; S39	S21; S22; S23; S24; S25; S26; S27; S28; S29; S30; S31; S34; S35; S36; S38; S40;
		
Luxury	Sports/Coupe	Cabrio
Vehicle types were grouped into one category – T3		
Subjects studied:		
x	S41; S43	S42; S44; S45; S46; S47; S48, S49



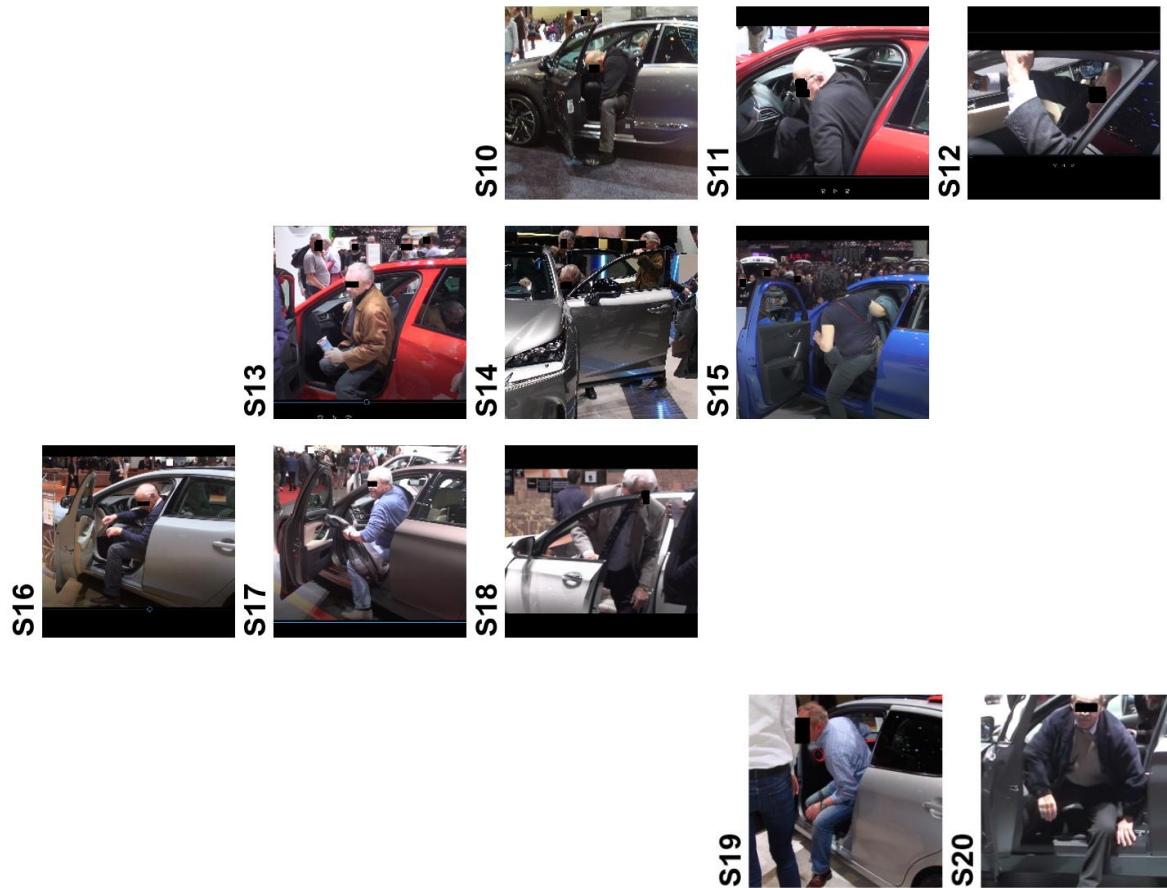
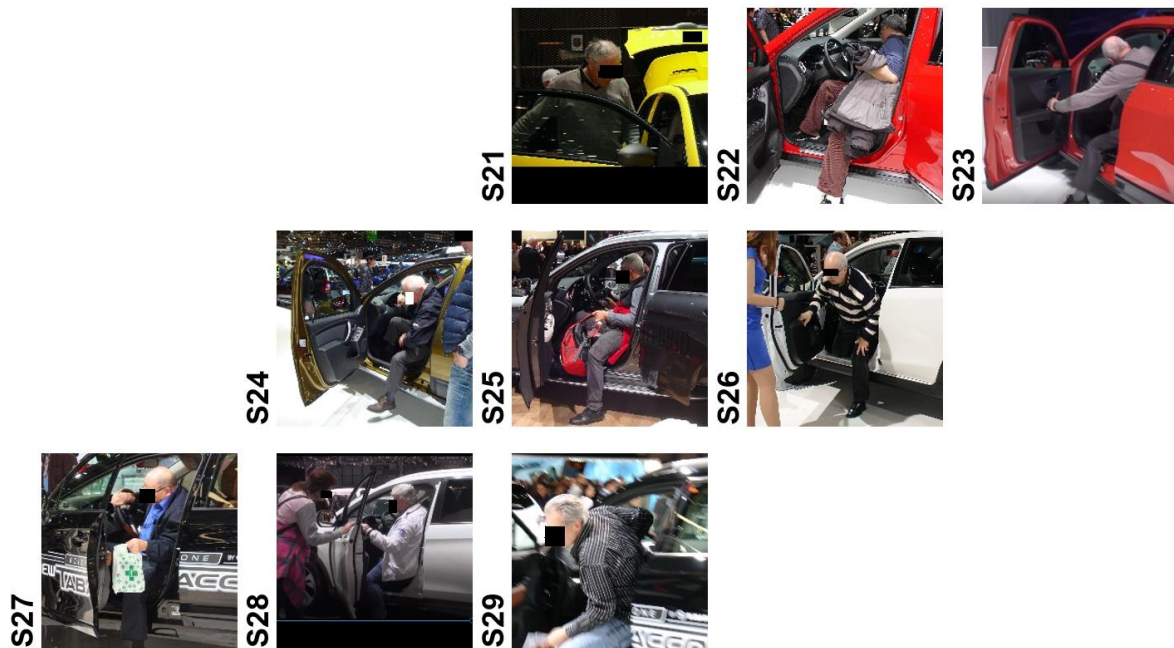


Figure 1. Classification of the 20 subjects studied in T1 vehicles (which group utility and sedan models).



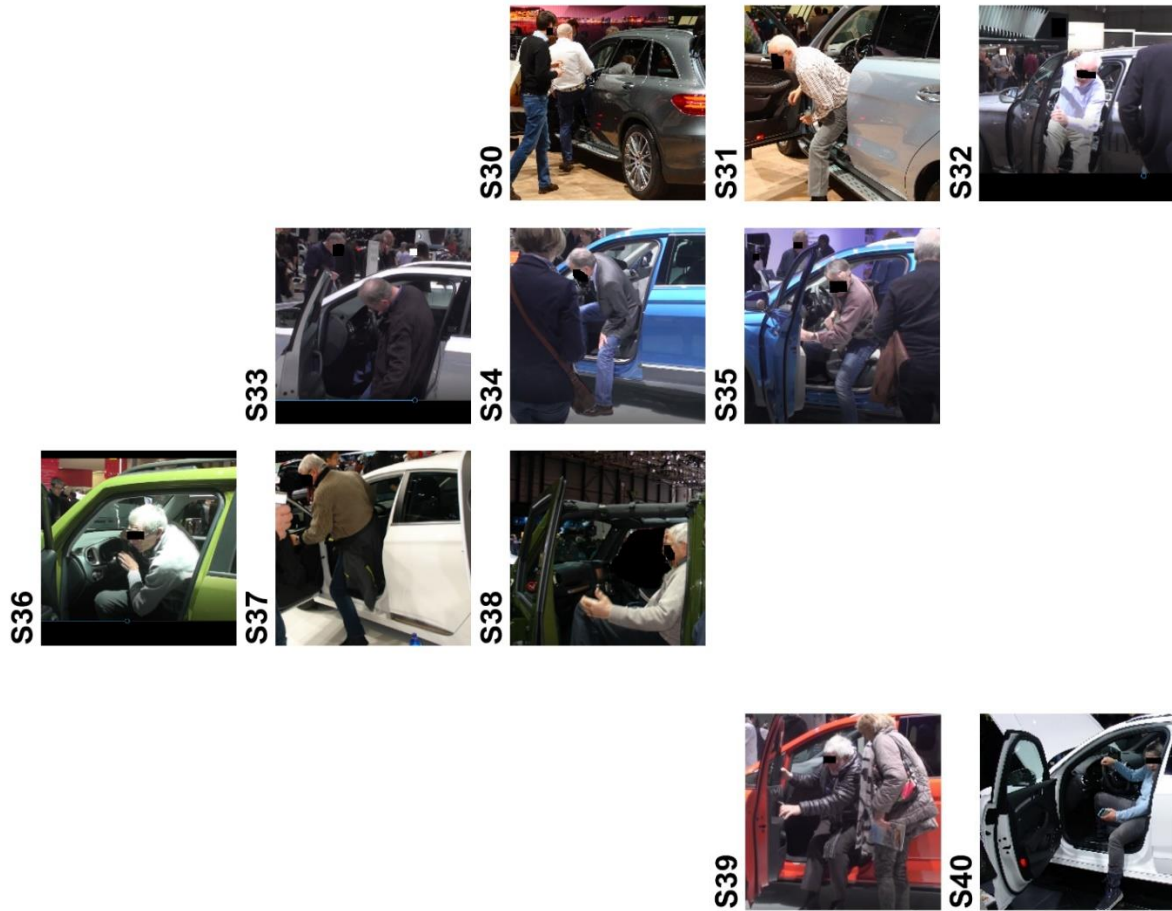


Figure 2. Classification of the 20 subjects studied in T2 vehicles (which group the minivan and SUV/TT models).



Figure 3. Classification of the nine subjects studied in T3 vehicles.

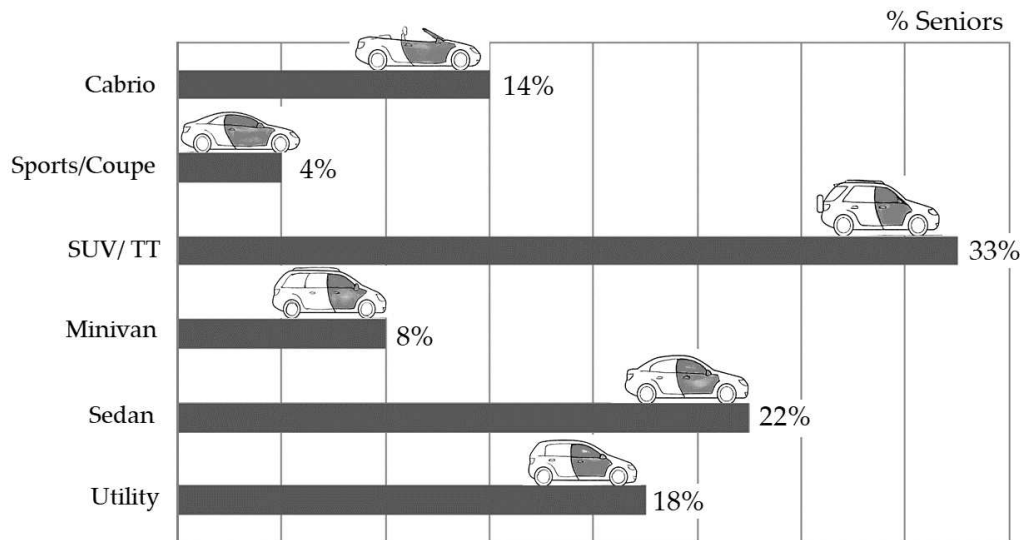


Figure 4. Proportion of seniors studied by vehicle types.

3. Results and Discussion

To understand the movement strategies used by the subjects in the study, we adopted a cartesian X, Y, Z reference regarding the parts of the vehicle that influence these strategies. This reference is common to other previous studies in this investigation area, and we chose it to maintain a common analysis methodology. The axis system reference represents, in a simplified way: the base of the car—plane X, Y; the thresholds of the door—plane X, Z—and at the top point of the plane of the door is the imaginary plane of the roof; the driver's front seat; the central point represents the "H" point—the reference point of the driver's centre of mass in the driving position; and the steering wheel (**Figure 5**).

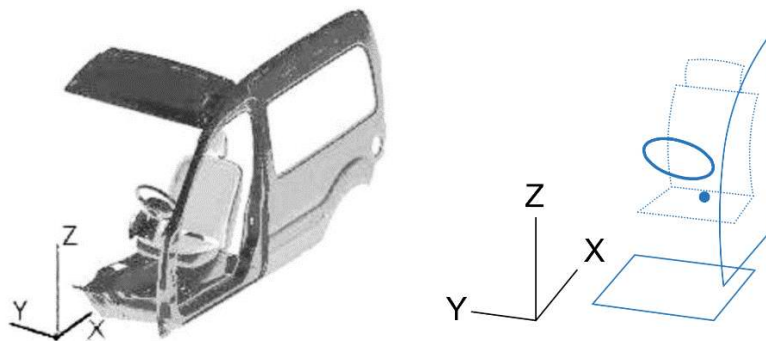


Figure 5. The cartesian framework for measuring movement strategies: (left) framework used by J. Causse et al. [17]; (right) outline of the principle framework adopted in this study.

As a reference of the human model to reconstruct the movement of entering the vehicle, we used the three-dimensional humanoid model (**Figure 6**, left) adopted by the automotive industry and by other authors of pioneering studies in this area of investigation [40,41] to standardize and compare visual analysis methods. The humanoid model has 20 degrees of freedom and is intended to represent, in a simplified way, the parts of the human body and their respective joints. The model is composed of three open kinematic chains representing the lower limbs, the trunk, and the head. It should be noted that the upper limbs are not the target of analysis, as the movement strategies of these parts vary significantly among subjects. Based on this humanoid model, a new simplified model was designed for the analysis and demonstration of research results.

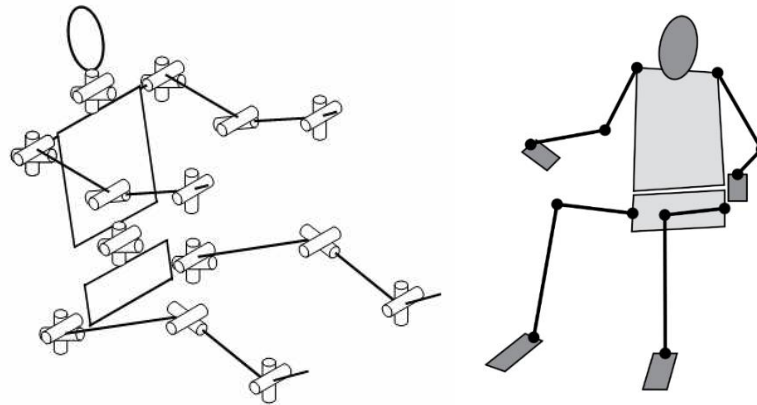




Figure 6. (left) Humanoid model: framework used by Ouidir et al. [41], Ait El Menceur et al. [32,40], and others; (right) humanoid model adopted in the present study.




The observations made regarding the movements of entering the car confirm the results of the precursor studies [32,40], which point out a series of movements required to enter a vehicle, categorized into three phases: door opening; adaptation of the entrance movement; and positioning on the seat. The last two phases vary depending on drivers, who may use either a “one-foot” or a “two-foot” entry strategy, as each type of strategy requires a unique set of moves. The door-opening phase is consistent for all entry strategies. During the movement adaptation phase, the driver uses a one-foot or two-foot placement strategy.

3.1. Entry (ingress) strategies

In the present study, it was found that when users got into cars, they used one-foot or two-foot strategies, which can be subdivided into specific strategies. Five distinct entry strategies were identified (**Table 2**): three one-foot entry strategies – (1) lateral sliding, (2) backward movement, and (3) forward movement; and two two-foot entry strategies – (4) leaning forward and (5) leaning back.

Table 2. Car Entry Movement Strategies.

Entry strategies	Subjects
 One-foot entrance	(1) with side slip S8; S9; S13; S17; S22; S25; S27; S28; S40; S47; S49
	(2) lateral position with trunk backward S2; S6; S10; S12; S15; S19; S21; S23; S26; S31; S33; S34; S36; S37; S44; S45; S46

		<p>(3) lateral position with trunk forward</p> <p>S3; S7; S14; S16; S24; S29; S30; S32; S35; S48</p>
Two-foot entrance		<p>(4) with the torso forward</p> <p>S1; S5; S20; S39; S43</p>
		<p>(5) with the torso back</p> <p>S4; S11; S18; S38; S41; S42</p>

This investigation made it possible to identify which movement strategies were most used by seniors when getting into the car. Thus, 11 subjects used strategy (1); 17 subjects used strategy (2); 10 subjects used strategy (3); five subjects used strategy (4), and six subjects used strategy (5). **Figure 7** illustrates the corresponding percentages of movement strategies for the sample universe. **Figure 8** illustrates the percentage of strategies adopted during the entry movement by vehicle type.

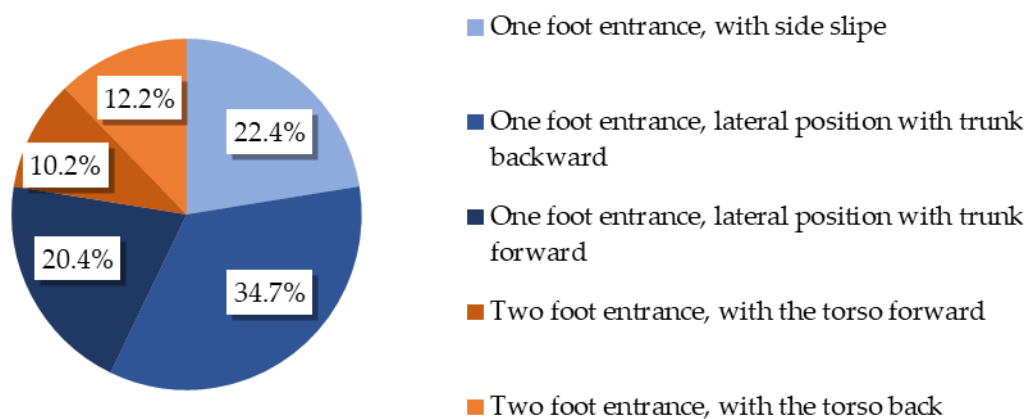


Figure 7. Percentage of car entry strategies adopted by seniors.

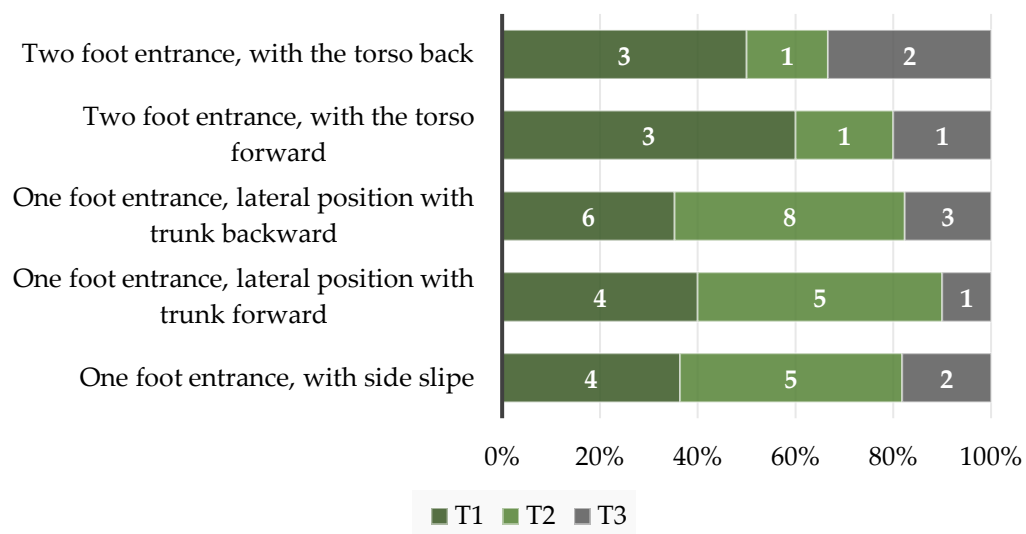


Figure 8. Percentage of entry strategies adopted by seniors according to vehicle type groups.

From the analysis of the graphs (**Figures 7 and 8**), it is possible to conclude that the movement strategies during the entry process into different types of vehicles were nearly uniform. Thus, there was no evidence of any type of movement strategy characteristic for a certain type of vehicle. This indicates that the main influencing factor in vehicle entry movement strategies may be related to individuals' physical capacity levels and previous somatic movement experiences and not dependent on the geometry of the vehicle typology experienced. It becomes evident that individuals with greater physical limitations, especially at the locomotor level, and also older individuals adopted entry movement strategies that involved the simultaneous use of two legs, diverging only in terms of trunk and upper limb movement (sometimes with the torso forward, sometimes with the stride reclined backward). A relevant aspect associated with entry processes in vehicles using both feet (simultaneously) is the fact that users use areas to support their hands, which may be a factor to consider in the design and development process of future automobiles, as well as to be considered in 3D simulation computational software for product validation adopted by the automotive industry. If, on the one hand, movement strategies are dependent on the level of physical capacity of users, then, on the other hand, somatic experience and synesthesia cannot be dissociated from strategies and respective motivations. Older drivers who use cars more have acquired, through somatic experience, something like a sensory autobiography in the practice of doing so, which they tend to replicate in new situations.

3.2. Exit (egress) strategies

In this investigation, exit movement strategies can be characterized as a process with three distinct phases (as previously observed by Chateauroux & Wang) [28]. The first phase begins after the driver opens the vehicle door and then moves one or both feet from inside the cabin to outside the vehicle. During this phase, increased hip flexion is performed to allow the driver's feet to pass through the threshold of the doorway (along the Z-axis). The driver's torso and head also rotate outward in preparation for exiting the vehicle. The second phase begins with the driver flexing the neck and leaning the body out of the vehicle, passing through the edges of the door frame (along the Z-axis). Like Chateauroux and Wang [28], we observed that drivers transferred their weight to their feet. That is, in a two-footed movement strategy, weight is distributed equally across both feet, whereas in a single-foot exit strategy, weight is transferred to the left leg. During a one-foot strategy, the driver's right foot is placed on the outside of the vehicle while the driver maintains balance by transferring body weight to the left foot. During the third and final phase of the exit strategy, drivers transition to an upright position, culminating in the closing of the door, thus signaling their exit from

the vehicle. During the process of getting out of the car, these three phases can be divided into four movement sub-strategies, which are identified below:


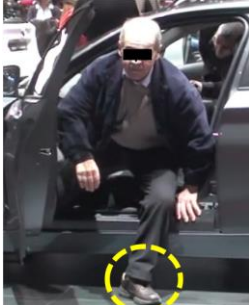
- (1) Back extension sub-strategy. Individuals extend their backs to lean on the backrest. The pelvis rotates backward on the seat, and they do not turn relative to the seat to exit.
- (2) Lateral flexion sub-strategy. Individuals lean to the right side. The centre of mass of the upper body is shifted over the right thigh. The pelvis is rounded, and the left hip is raised relative to the right side.
- (3) Sub-strategy of hip rotation over the back-supported seat. This consists of rotating the trunk and upper limbs on the seat towards the door, with the rotation carried out around the left part of the back that rests on the backrest.
- (4) Rotation sub-strategy without backrest support. The strategy is very similar to the previous one, but in this case, the individual turns in the seat at the same time as pulling on the steering wheel. The back is not supported by the backrest.


In addition to the previously mentioned sub-strategies, it was possible for us to verify the variants already mentioned in the study by Chateauroux and Wang [28]—one of the most complete studies in terms of evaluating the sub-strategies of the exit movement.

Given the size of the sample in this study, the main strategies were identified and the sub-strategies were not analysed, not least because variations were identified in the movements at the level of the upper limbs and trunk—which require future developments—compared to the sub-strategies of movement pointed out by Chateauroux and Wang [28]. Therefore, to evaluate the car exit processes, we decided to examine the sample of individuals under study according to the model proposed by Ait El Menceur et al. [32]. In this simplified model, three exit strategies are identified, of which two strategies are one-foot (head forward or parallel to the vehicle) and one is two-foot.

Table 3 identifies the individuals and points out the respective movement strategies adopted during the exit of the cars.

Table 3. Car Exit Movement Strategies.

Exit strategies	Subjects
	<p>(1) head forward</p> <p>S2; S6; S7; S9; S10; S11; S14; S15; S17; S21; S22; S23; S24; S25; S28; S30; S33; S34; S35; S37; S45; S46; S47; S48</p>
<p>One-foot exit</p> 	<p>(2) parallel to the vehicle</p> <p>S3; S8; S12; S13; S16; S18; S19; S20; S26; S27; S29; S31; S32; S36; S40; S43; S44; S49</p>

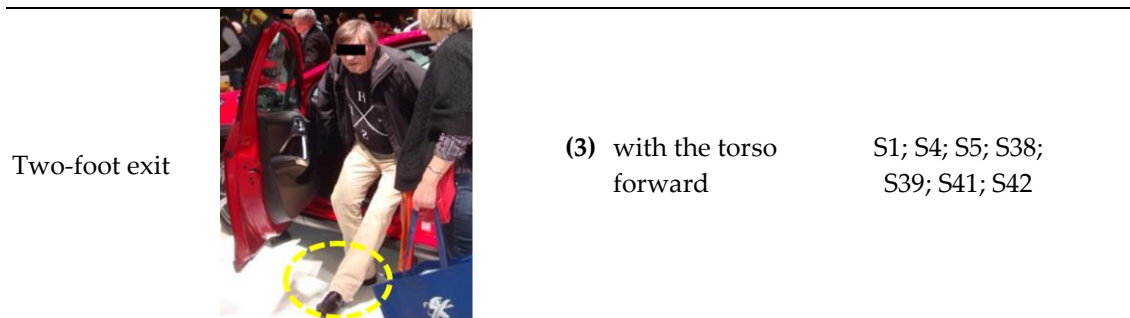

The research made it possible to assess which movement strategies were most used by seniors when leaving the car. Thus, 24 subjects used the type (1) exit strategy; 18 subjects used the type (2) strategy; 7 subjects used the type (3) strategy.

Figure 9 presents the corresponding percentages of the exit movement strategies for the sample universe.

From the analysis of the graphs (**Figures 9** and **10**), it is possible to conclude that the movement strategies during the exit process in different types of vehicles were practically uniform for the universe of the sample. However, the most prevalent strategy was the one that uses only one foot on the way out with the head leaning forward, which corroborates the results shown in other pioneering studies in this research area.

The movement adopted in the process of egress of the vehicle is more complex and difficult, in general, than that observed for entering, requiring greater flexibility, agility/dexterity, and physical strength of individuals. The main factor that influences movement strategies during exiting vehicles, as verified for the entry process, is essentially related to the levels of physical capacity of individuals. Therefore, it was concluded that there was no significant change in the strategy adopted by individuals based on the type of vehicle. However, it should be noted that in the case of sports vehicles/coupsés and cabrios, there is a tendency to adopt exit strategies parallel to the vehicle. This behaviour may be associated with the greater reclining angle of the seat base, which induces greater effort to leverage the hip, as well as the smaller cockpit space for the driver, which substantially limits forward reclining strategies. Thus, functional design problems associated with the component geometry of parts of these types of vehicles are more evident during the output process.

Figure 10 illustrates the percentage of strategies adopted during the exit movement according to vehicle typology groups.

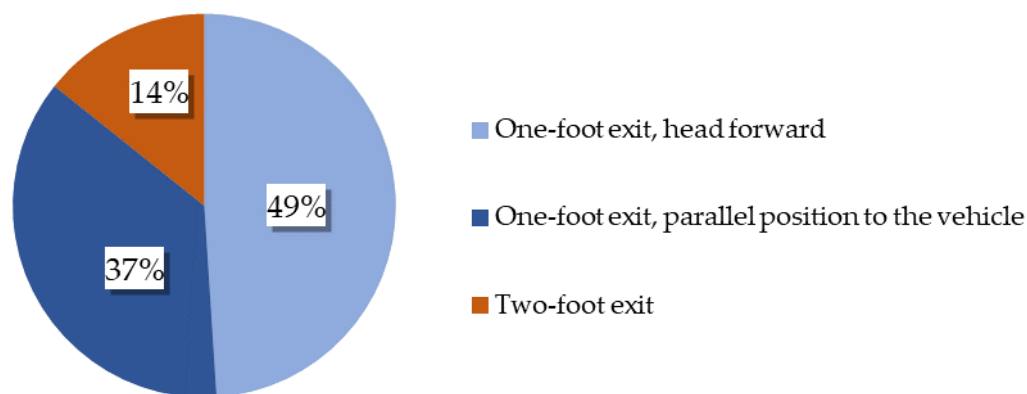


Figure 9. Percentage of car exit strategies adopted by seniors.

The research showed that subjects with greater physical limitations, especially at the locomotor level, and the oldest subjects adopted exit movement strategies that involved the simultaneous use of two legs, diverging only in terms of the movement of the trunk and superior limbs (sometimes with trunk forward, sometimes leaning backward, sometimes resting hands on steering wheel, seat backrest, door frame, and others). Therefore, a very relevant aspect associated with exit processes in

vehicles using both feet (simultaneously) is the fact that users find areas to support their hands (**Figure A6**). The handgrip zones are factors to be considered in future research work, but also to be considered in the design and development process of a car. There is also the need to assess the possibility of users carrying objects in at least one of their hands so those behaviours can be analysed.

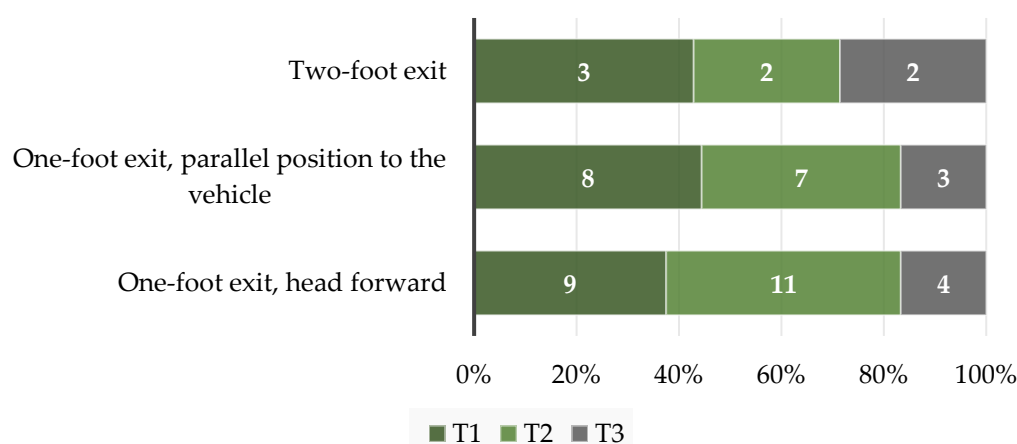


Figure 10. Percentage of exit strategies adopted by seniors according to vehicle type groups.

4. Conclusions

The automobile effectively exerts an “attraction” on subjects, in general, and on seniors, in particular. This became even more evident due to the high number of visitors, especially those over 50 years old, who attended the GIMS. This finding made it possible to carry out studies of behavioural observation of seniors with relative ease, despite the high number of interferences in the images that occurred during filming. Naturally, those who visit GIMS do so with the aim of observing new car models and, only afterwards, if possible, trying them out, so this finding is obvious. However, at the beginning of the study, we did not expect to find such a high influx of seniors in this place; the numbers are demonstrative of the high interest of seniors in cars. Despite the difficulties with collecting and recording images that validated this study, as well as gaining subsequent approval (informed consent) from the subjects, it was not difficult to observe the subjects’ behaviour.

We concluded that seniors are more likely to try taller vehicle typologies, such as SUVs—especially crossovers, minivans, sedan models (five-seater city cars, family-type), and mid-high range (which tend to have higher cabins), as well as small Jeeps, although to a lesser extent than the types of vehicles mentioned above.

After getting into the car, almost all users closed the door, presumably with the aim of evaluating aspects of the passenger compartment design, such as comfort, comparing them to the actual driving situation (that they would find in their own vehicles).

It is concluded that the degree of effort in opening the door (hand on the handle/handle itself), weight, opening angle, height, and width of the door are important. Larger doors, with a greater opening angle, allow for faster access to the steering wheel. However, if the doors are too heavy, they can be difficult or awkward to open, especially when the user must pull the door while carrying a coat or bag in one hand. Discomfort when opening doors was observed mostly in SUV and TT vehicle typologies, given the robustness of the structures, weight, and larger dimensions of the door panel, both in height and width.

Some subjects, as they age, are more likely to be overweight and, in many cases, also have greater volume in the abdomen region. In the subjects observed with these anthropometric characteristics, we highlight individuals S6, S17, S22, S23, S28, and S37, who have greater height and volumetry. Given the perceived size, these seniors opted, right from the start, to try vehicles with larger passenger compartments and greater door width and height (**Figure A1**). Therefore, taller subjects with a

higher fat mass index present greater difficulties, as do their opposites, that is, shorter and thinner individuals.

Consider, by way of example, subject S28. In this case, the SUV had the particularity of having its front door window open. Thus, in the absence of glass, the senior used the door frame to support his left hand and forearm, both during the entry and exit movements (**Figures A3, A12 and A13**). Subject S28 did not show discomfort during ingress into the SUV for several reasons: (i) support of the left hand on the door frame, which facilitates balance and entry into the vehicle; (ii) support of the right hand on the steering wheel—in a round geometric shape and with a significant diameter; (iii) the highest vehicle passenger compartment height; (iv) the large dimensions of the door width and height; (v) the height of the seat above ground level—the position at the centre of the individual's thigh—which implies not having to bend down too much to enter; (vi) side cushions on the seat and on the backrest of the front seat that are not very pronounced; (vii) ample volume of the driver's cabin.

Subject S28, during the egress, demonstrated some discomfort (**Figure A14**), perceived by the support of hands and position on the seat. This discomfort was due to several factors, namely: (i) the proximity of the front seat to the steering wheel (the seat should have been slightly moved back)—the driver's obesity, especially in the abdomen region (**Figure A15**), made him lean his belly against the steering wheel during the exit movement and created some resistance on the exit; (ii) the fabric used to cover the front seat, which creates some friction and restricts movement; (iii) the high height of the doorway, which presented as "like a step on a ladder".

Despite some perceived discomfort for S28 in leaving the SUV, this type of vehicle is the best option for seniors with greater physical stature, weight, and body volume. Accessibility in lower-to-the-ground vehicles, such as sports and utility models, provides greater discomfort for this type of user. Individual S17 (**Figure A2**), for example, a little shorter in stature, had difficulties like those of individual S28 when getting out of a sedan. This is because, proportionally, the smaller physical stature of S17 also corresponded to smaller dimensions in the sedan (such as door dimensions—height and width—and volume of the driver's cabin compartment).

Despite the absence of studies on the behaviour of the upper limbs (for example, shoulder girdle, arm, forearm, and hand), we observed that they make a high contribution to body balance and minimize discomfort in car accessibility, especially in subjects with a greater fat mass index. For example, it is common for the left hand to rest on the inside handle of the door panel (**Figure A1**, left and right images) and the right hand to rest on the steering wheel (**Figures A2, A3, and A4**), especially during entry.

We can conclude that another aspect that exerts a strong influence on movement strategies when both entering and exiting the car, regardless of the physical stature of the individual and the type of vehicle, in terms of hands and postural balance, relates to whether the individual is carrying personal objects, such as a piece of clothing—usually a coat (**Figures A2, A3, A7**); a wallet; a bag or a backpack (**Figure A1**, left, and **Figure A5**); a mobile phone (**Figure A8**); or a book or magazine (**Figure A9**). These behaviours characterize situations that can occur naturally during the daily use of cars, which justifies further studies in this area, given that this constitutes a perceived gap in previous investigations.

A very relevant aspect associated with exit processes in vehicles using both feet (simultaneously) is the fact that users use areas of the car to support their hands (**Figure A6**). The handgrip zones are factors to be considered in future research work, but also to be considered in the design and development process of a car. There is also the need to assess the possibility of users carrying objects in at least one of their hands to assess their respective behaviours.

The existing literature on movement strategies for entering and exiting a car is silent when dealing with users' interaction with the main parts of the vehicle and the influence of handholds. In this research, while exiting the car, subjects made rotational movements of the hips, trunk, and upper limbs on the seat, with support of the upper limbs on parts of the vehicle, such as the steering wheel and the door panel, which assumed special importance for physical balance and for the adoption of comfortable positions. To illustrate this behaviour, observed recurrently in the studied individuals

(Figure A11), the vehicle model with cartesian references and the humanoid model were used, as presented in Figures 5 and 6.

If, on the one hand, the inclination of the seat influences a person's ability to exit the car, on the other hand, a more appropriate choice of materials used in the construction of the front seats can help all movement strategies. Materials such as leather or synthetic leather make it easier to slide the body in or out of the seat than fabrics (textiles).

The steering wheel is an important support point in both entering and exiting the car. Many of the individuals in the study leaned on the steering wheel during the movement, which is why, in addition to being round, the wheel must have considerable thickness or diameter to improve hand support.

It is demonstrated that vehicle entry/exit movement strategies are strongly dependent on the physical capacity of the users and that older people have greater difficulties in accessing a car, with some types of vehicles being more favourable to minimizing this discomfort (e.g., SUVs).

The somatic experience and synesthesia cannot be dissociated from movement strategies and respective motivations, which were more prominent in the individuals under study when they exited the vehicles. When comparing entry and exit movement strategies, it appears that individuals who adopt two-foot entry processes tend to also use both feet to exit. The study also concluded that the type of vehicle does not, by itself, influence the movement strategies adopted by users, as shown by the results in Table A10. The human body, as it were, acquires a memory of the experience that it tends to replicate in new situations/experiences.

This research had the main advantage of allowing the evaluation of the entry and exit movements of new car models without any conditioning of the behaviour of the studied individuals since they initially did not know that they were being observed. Therefore, they were not predisposed to try to reproduce movements that they considered the "normal" pattern and/or to hide constraints motivated by physical limitations associated with age. Furthermore, experimenting with a "new" car highlighted the effect of the user's somatic experience, as well as the true constraints and critical points of the main physical interfaces to be considered in the evaluation of car design.

Considering the size and sampling technique used, the conclusions and observed facts should not be taken as generalizable to the senior population. The sample is not representative of the pre-senior and senior population in general, namely in terms of human anthropometry; age group; health status; physical condition; the geometries and dimensions of the vehicles; and gender. More detailed future studies are recommended to measure the results of the investigation. However, being an exploratory study, it allows for corroborating limitations in senior individuals, previously identified in the literature, and identifying aspects of improvement at the ergonomic level and the design of the physical interfaces involved in accessibility to the interior of the car.

This section is not mandatory but may be added if there are patents resulting from the work reported in this manuscript.

Author Contributions: The entirety substantial work was carried out by the author.

Funding: This research received no external funding.

Institutional Review Board Statement: Not applicable.

Informed Consent Statement: Informed consent was obtained from all subjects involved in the study.

Data Availability Statement: For ethical reasons of respect for personal integrity and privacy, to safeguard the image of all subjects who participated in this study, but also of other involuntary subjects, objects, spaces, and places, image and video files will not be disclosed. The researcher reserves the right to comply with good practices and guidelines of Research Ethics.

Acknowledgments: To all those who participated in this study and authorized sharing their image, even in an anonymous and non-identifiable way, to contribute to scientific knowledge. To my friend Eurico Ladeira who supported me in collecting the Subjects' informed consent and video images.

Conflicts of Interest: The author declares no conflict of interest.

Appendix A



Figure A1. Senior men when entering vehicles with a raised passenger compartment: (left) Subject S23; (center) Subject S6; (right) Subject S37.



Figure A2. Subject S17 in a Sedan vehicle: (left) getting out of the car; (on the right) getting into the car.



Figure A3. Subject S22 in an SUV vehicle – (left) inside the car; (right) getting out of the car.



Figure A4. Subject S28 in an SUV vehicle: (left) getting into the car; (right) getting out of the car.



Figure A5. Subject S28 in an SUV vehicle: (left) getting into the car; (right) getting out of the car.



Figure A6. Subject S28 in an SUV vehicle: (left, A,B) getting into the car; (right, C,D) getting out of the car.



Figure A7. Senior woman - getting into car.



Figure A8. Exiting an SUV car charging a mobile phone: (left) woman S40; (right) senior man.



Figure A9. Men S40, S5, S8 and S44 carry a magazine while leaving cars.

Table A10. Entry and exit movement strategies by vehicle typology group.

Number of entry and exit movement strategies by vehicle typology group				
group	T1	T2	T3	Total
1 foot entry with side slide / 1 foot exit, head forward	2	3	1	6
1-foot entry with side slide / 1-foot exit, parallel to vehicle position	2	2	1	5
1-foot entry, lateral position with torso forward / 1-foot exit, head forward	2	3	1	6
1-foot entry, lateral position with torso forward / 1-foot exit, parallel position to the vehicle	2	2		4
1-foot entry, lateral position with torso back / 1-foot exit, head forward	4	5	2	11
1-foot entry, lateral position with torso back / 1-foot exit, parallel position to the vehicle	2	3	1	6
2-foot entry with trunk forward / 1-foot exit, parallel position to the vehicle	1		1	2
2-foot entry with torso forward / 2-foot exit	2	1		3
2-foot entry, torso back / 1-foot exit, head forward	1			1
2-foot entry with trunk backward / 1-foot exit, parallel position to the vehicle	1			1
2-foot entry with trunk backward / 2-foot exit	1	1	2	4
Total	20	20	9	49

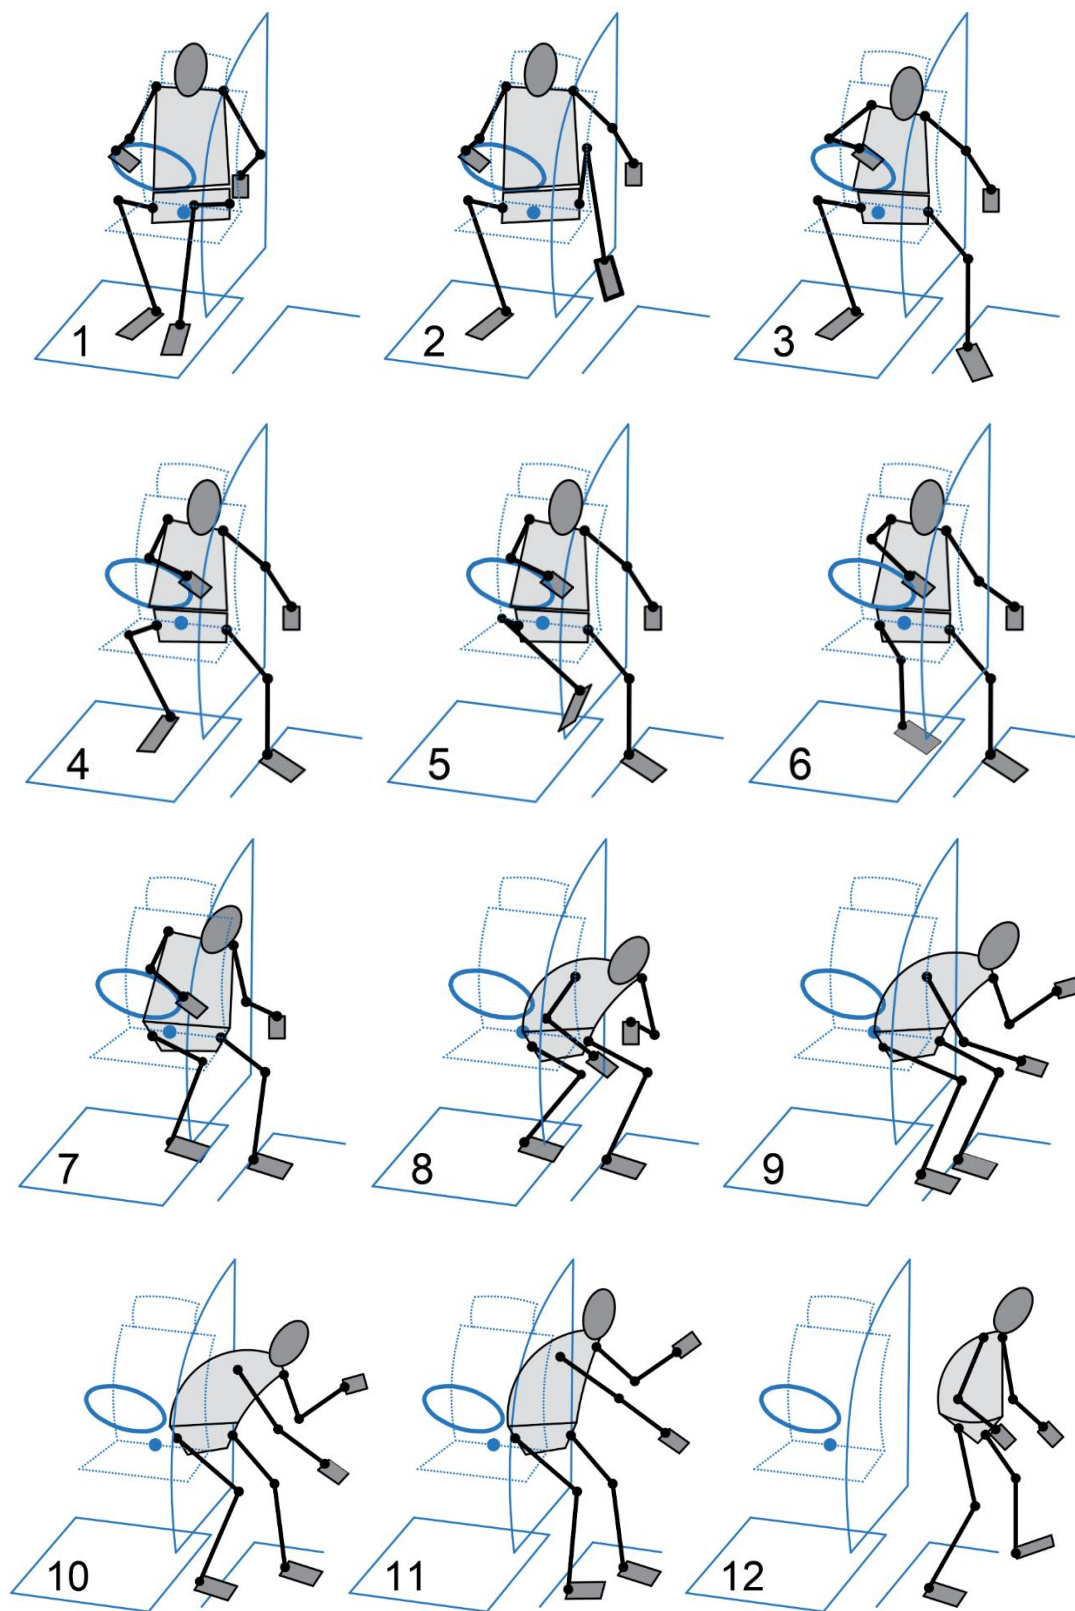


Figure A11. Illustration of the sequence of an exit strategy from a vehicle by older seniors and/or individuals with greater physical limitations: rotation of the back on the seat; two legs and arms supported.

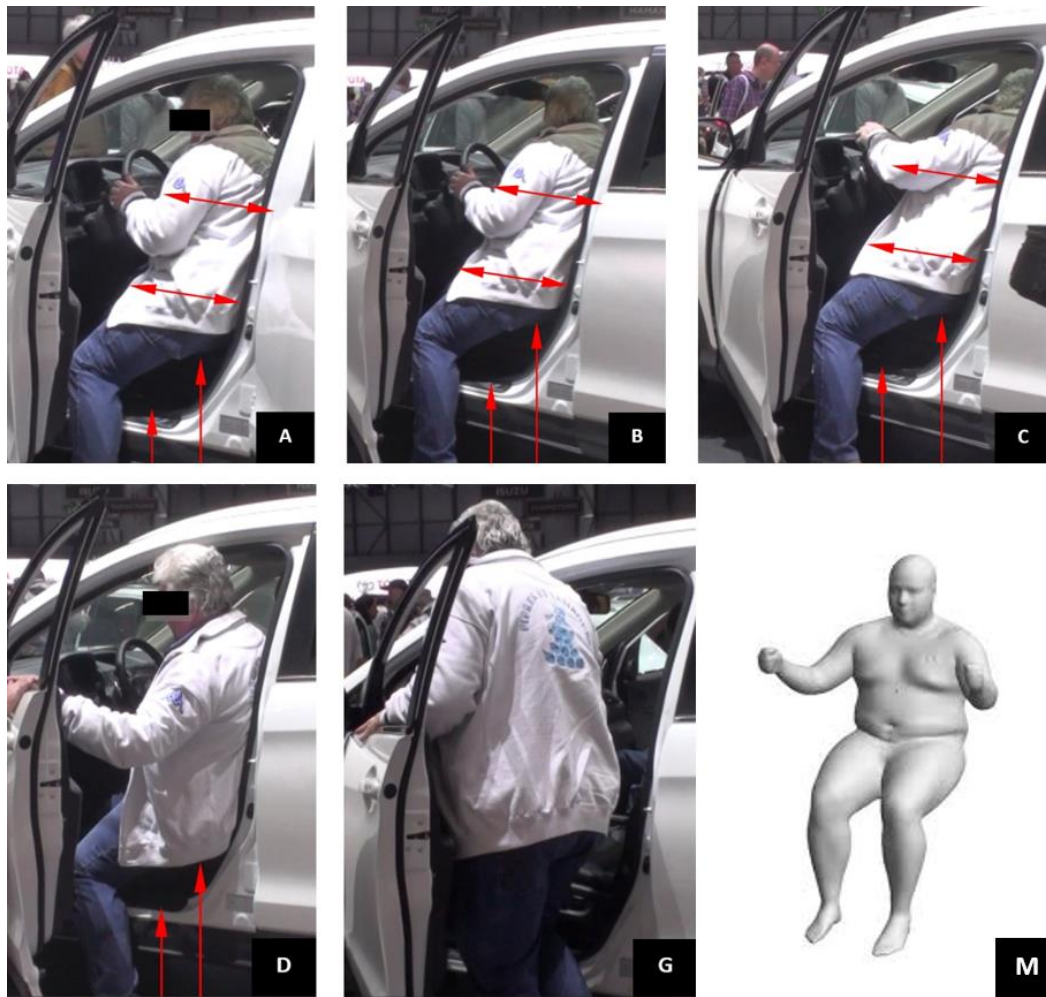


Figure A12. Assessment of accessibility in an SUV vehicle by the individual S28. Ingress: A, B, C. Egress: D, G.; M. – Anthropomorphic comparison of subject S28 with the human model of an obese person (Reed) [42].



Figure A13. Senior woman carrying a sweater while exiting an SUV.

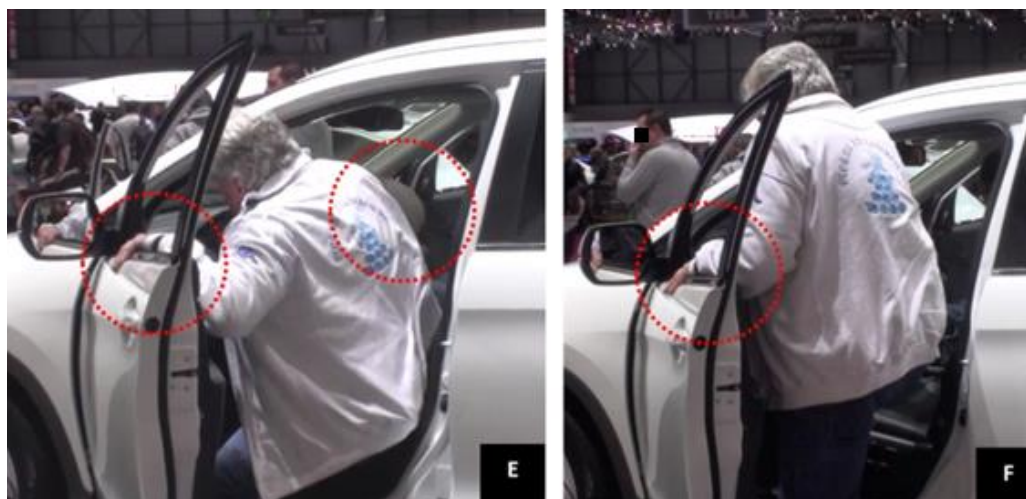


Figure A14. Evaluation of hand and arm support of the individual S28, during the exit of the SUV vehicle.

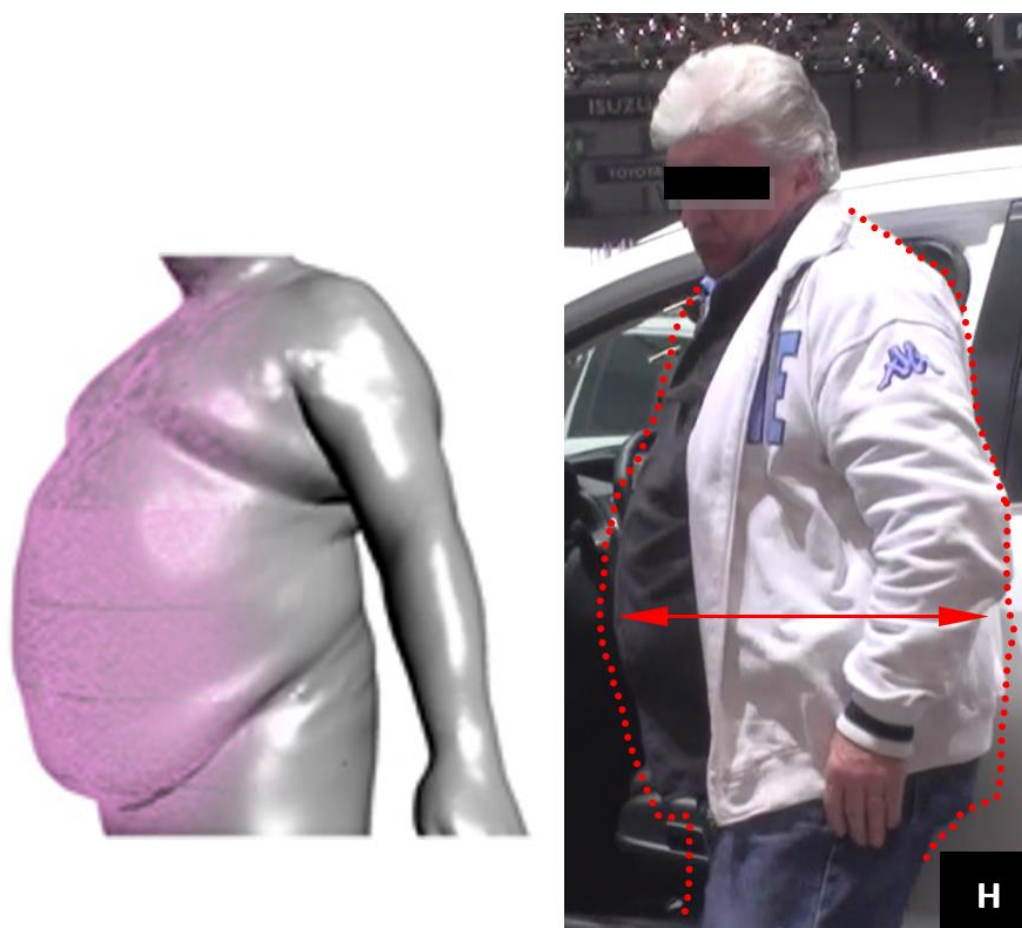


Figure A15. Comparison of 3D digital model of an obese senior man developed by Reed [42] (left image) with senior subject S28 from the visual study (right image).

References

1. Edmunds. Available online: <http://www.edmunds.com/car-reviews/top-10/top-10-vehicles-for-seniors-for-2014.html> (accessed on 25 May 2023).
2. Gransitzki, K. Biomechanics of entering a car. Second International Congress on Physiological Anthropology, University of Kiel, Germany (September 12–16, 1994), pp.12–16.

3. Soames RW; Palastanga D; Palastanga N. *Anatomia do Movimento Humano: guia de bolso*, 3rd ed.; Elsevier: Brasil, 2011 Nov 11.
4. Nordin, M.; Frankel, V.H. *Biomecânica básica do sistema musculoesquelético*, 3rd ed.; Editora Guanabara Koogan: Rio de Janeiro, Brasil, 2003; pp.10–106.
5. Santos, A. *A biomecânica da coordenação motora, Fisioterapia em movimentos*. 3rd ed.; Ed. Summus Editorial: São Paulo, Brasil, 2002; pp.60-180.
6. Amadio, A. *Fundamentos Biomecânicos para a Análise do Movimento Humano*. Laboratorio de Biomecânica/Efeusp, Edição da Universidade de São Paulo, São Paulo, Brasil, 1996; pp.56–160.
7. Routes. Available online: <http://www.reuters.com/article/us-cars-risky-seniors-idUSHAR36318220080423>. (Accessed on 25 May 2023), by Harding, A. (2008, Ap.23). *Getting in and out of cars risky for seniors*.
8. United Nations Department of Economic and Social Affairs, Population Division. *World Population Prospects 2022: Summary of Results*. UN DESA/POP/2022/TR/NO. 3, 2022.
9. Shergold, I.; Lyons, G.; Hubers, C. Future mobility in an ageing society – Where are we heading? *Journal Of Transport & Health*, 2 (*Transport, travel and mobility in later life*), **2015**, pp. 86–94. doi: 10.1016/j.jth.2014.10.005.
10. Fernandes, S.C.F. Challenges to Automotive Interior Design: The Future Is Much More Than Technology – It's About People! In *Perspective on Design, Springer Series in Design and Innovation*; Raposo, D., Neves, J., Silva, J., Eds. vol 1. Springer: Springer Nature Switzerland AG, 2020; Volume 1, pp.385–402. https://doi.org/10.1007/978-3-030-32415-5_29.
11. Fernandes, S.C.F.; Esteves, J.L.; Simoes, R. Characteristics and human factors of older drivers: Improvement opportunities in automotive interior design. *International Journal of Vehicle Design* **2017**, 74(3), pp. 167–203.
12. Gish, J.A.; Vrkljan, B. Aging embodiment and the somatic work of getting into and out of a car. *Journal of Aging Studies* **2016**, 36, 33–46. <http://doi.org/10.1016/j.jagin.2015.12.004>.
13. Herriotts, P. Identification of vehicle design requirements for older drivers. *Applied Ergonomics* **2005**, 36 (3), 255–262. <https://doi.org/10.1016/j.apergo.2005.01.002>.
14. Bhise, V.D. *Ergonomics in the Automotive Design Process*, 1st ed.; Taylor & Francis Group, CRC Press: Boca Raton, 2011; pp. 2–22.
15. Eby, D.W.; Molnar, L.J. *Has the Time Come for an Older Driver Vehicle?* Report No. UMTRI-2012-5. Ann Arbor, MI: University of Michigan Transportation Research Institute, USA, 2012; pp. 10–14.
16. Zhan, J.; Porter, M.M.; Polgar, J.; Vrkljan, B. Older drivers' opinions of criteria that inform the cars they buy: a focus group study. *Accident Analysis & Prevention* **2013**, 281–287.
17. Causse, J.; Wang, X.; Denninger, L. An experimental investigation on the requirement of roof height and sill width for car ingress and egress. *Ergonomics* **2012**, 55 (12), 1596–1611.
18. Herriotts, P.; Johnson, P. (2013). Are you sitting comfortably? A guide to occupant packaging in automotive design. In *Automotive Ergonomics: Driver-vehicle Interaction*; Gikkas, N. Eds.; Taylor & Francis Group, CRC Press: Boca Raton, 2013, pp.17–39.
19. Ait El Menceur, M. O.; Pudlo, P.; Gorce, P.; Lepoutre, F.-X. An automatic procedure for identifying alternative automobile ingress movements in young and elderly populations with or without prostheses. *International Journal of Industrial Ergonomics* **2009**, 39(6), 966–980. <http://doi.org/10.1016/j.ergon.2009.08.010>.
20. Ait El Menceur, M.O.; Pudlo, P.; Debril, J.-F.; Lepoutre, F.-X.; Gorce, P. An automatic method to identify human alternative movements: application to the ingress movement. *J. Autom. Mob. Robot. Intell. Syst.* **2009**, 3(3), 64–69.
21. Sternini, D.; Cerrone, M. Setup of an experimental procedure for measuring the human body movements when entering and exiting the vehicle. In *Proceedings of the 3rd International Conference on Vehicle Comfort and Ergonomics*, 1995, pp.257–265.
22. Verriest, J.P. Les mannequins numériques dans la conception de produits. Les modeles numériques de l'homme pour la conception de produits. In: *Short Communication of Institut National de Recherche sur les Transports et leur Sécurité*, Lyon, 2000.
23. Lawson, G.; Herriotts, P.; Malcolm, L.; Gabrecht, K.; Hermawati, S. The use of virtual reality and physical tools in the development and validation of ease of entry and exit in passenger vehicles. *Applied Ergonomics* **2015**, 48, 240–251. <https://doi.org/10.1016/j.apergo.2014.12.007>.
24. Hanson, L.; Blomé, M.; Dukic, T.; Högberg, D. Guide and documentation system to support digital human modeling applications. *International Journal of Industrial Ergonomics* **2006**, 36 (1), 17–224.
25. Wang, X. Simulation du mouvement humain en vue d'applications ergonomiques - Vers une approche de simulation basée sur données et assistée par connaissance. *J. Thémat. Soc. Bioméc. Human* **2003**, 129–135.
26. Rasmussen, J.; Christensen, S.T. Musculoskeletal modeling of egress with the Anybody modeling system. Technical Paper 2005-01-2721. *SAE International* **2005**, Warrendale, PA. doi:10.4271/2005-01-2721.
27. Robert, T.; Causse, J.; Denninger, L.; Wang, X. A 3D analysis of the joint torques developed during driver's ingress–egress motion. *Ergonomics* **2014**, 57(7), 1008–1020. doi:10.1080/00140139.2014.904525.
28. Chateauroux, E.; Wang, X. Car egress analysis of younger and older drivers for motion simulation. *Applied Ergonomics* **2010**, 42(2010), 169–177. doi: 10.1016/j.apergo.2010.07.001.

29. gmauthority.com. By Szymkowski, S. (Dec 29, 2016). General Motors Utilizing Virtual Reality To Help Finalize Future Vehicle Designs. In GMAuthority. Available online: <http://gmauthority.com/blog/2016/12/general-motors-utilizing-virtual-reality-to-help-finalize-future-vehicle-designs/#ixzz5OU3gbwtH> (accessed on 12 May 2023)
30. Pudlo, P.; Lempereur, M.; Lepoutre, F.-X.; Gorce, P. A new method for simulating the car-entering movement. *International Journal of Vehicle Design – special issue on digital human modelling and simulation, and applications in vehicle design* **2009**, 51 (3/4), 341–358.
31. Cherednichenko, A.; Assmann, E.; Bubb, H. *Computational approach for entry simulation*, Technical Paper 2006-01-2358; SAE International: Warrendale, PA, 2006; pp.619–627. doi:10.4271/2006-01-2358.
32. Ait El Menceur, M. O.; Pudlo, P.; Gorce, P.; Thévenon, A.; Lepoutre, F.-X. Alternative movement identification in the automobile ingress and egress for young and elderly population with or without prostheses. *International Journal of Industrial Ergonomics* **2008**, 38, 1078–1087.
33. Andreoni, G.; Rabuffetti, M.; Pedotti, A. *New approaches to car ergonomics evaluation oriented to virtual prototyping*. EURO-BME Course on Methods & Technologies for the Study of Human Activity & Behaviour, Italy, 1997.
34. Lempereur, M. Simulation du mouvement d'entrée dans un véhicule automobile. PHD thesis, Université de Valenciennes et de Hainaut Cambrésis, 2006/04.
35. Kawachi, K.; Aoki, K.; Mochimaru, M.; Kouchi, M. Visualization and classification of strategy for entering car. In Proceedings of the SAE International Conference and Exposition of Digital Human Modelling for Design and Engineering, Iowa, USA, (14–16, June 14–16, 2005).
36. Rigel, S.; Assmann, E.; Bubb, H. Simulation of Complex Movement Sequences in the Product Development of a Car Manufacturer, SAE Technical Paper 2003-01-2194, 2003, <https://doi.org/10.4271/2003-01-2194>.
37. Andreoni, G.; Rabuffetti, M.; Pedotti, A. Technical note: Kinematics of head-trunk movements while entering and exiting a car. *Ergonomics* **2004**, 47(3), 343–359.
38. Giacomini, J.; Quattrocolo, S. An analysis of human comfort when entering and exiting the rear seat of an automobile. *Applied Ergonomics* **1997**, 28(5), 397–406.
39. J. Giacomini; S. Quattrocolo. An analysis of human comfort when entering and exiting the rear seat of an automobile, *Applied Ergonomics* **1997**, 28(5–6), 397–406, ISSN 0003-6870, [https://doi.org/10.1016/S0003-6870\(97\)00001-X](https://doi.org/10.1016/S0003-6870(97)00001-X).
40. Ait El Menceur, M. O.; Pudlo, P.; Gorce, P.; Lepoutre, F. X. A numerical tool to simulate the kinematics of the ingress movement in variably dimensioned vehicles for elderly and/or persons with prosthesis. *International Journal of Industrial Ergonomics* **2015**, 47, 9–29. <https://doi.org/10.1016/j.ergon.2015.01.014>.
41. Ouidir, M.; El, A.; Pudlo, P.; Debril, J.; Gorce, P.; Lepoutre, F. An Automatic Method to identify Human alternative movements: Application to the ingress movement Abstract. *Journal of Automation, Mobile Robotics & Intelligent Systems, Robotics* **2009**, 3, 64–69.
42. Reed, M. P. Digital Human Modeling University of Michigan, Elderly Posture and Body Shape. UMTRI, U-M Transportation Research Institute, 2016.

Disclaimer/Publisher's Note: The statements, opinions and data contained in all publications are solely those of the individual author(s) and contributor(s) and not of MDPI and/or the editor(s). MDPI and/or the editor(s) disclaim responsibility for any injury to people or property resulting from any ideas, methods, instructions or products referred to in the content.