

1 Article

## 2 Flood Potential Mapping of Pesanggrahan River 3 Watershed in South and West Jakarta with LIDAR 4 Data Segmentation

5 Indra Riyanto<sup>1,2\*</sup>, Lestari Margatama<sup>1</sup>, S. Samsinar<sup>1</sup>, Babag Purbantoro<sup>3,4</sup>, Luhur Bayuaji<sup>5</sup>, Dodi  
6 Sudiana<sup>2</sup>, and Josaphat Tetuko Sri Sumantyo<sup>3</sup>

7 <sup>1</sup> Center for Environmental Studies, Universitas Budi Luhur, Indonesia; indra.riyanto@budiluhur.ac.id

8 <sup>2</sup> Department of Electrical Engineering, Faculty of Engineering, University of Indonesia, Indonesia;

9 <sup>3</sup> Center for Environmental Remote Sensing, Chiba University, Japan

10 <sup>4</sup> Indonesian Aeronautical Institute of Aeronautics and Space, Indonesia

11 <sup>5</sup> Faculty of Computer Systems & Software Engineering, Universiti Malaysia Pahang, Malaysia

12 \* Correspondence: indra.riyanto@budiluhur.ac.id; Tel.: +62-815-900-2864

13

14 **Abstract:** Degradation of environment quality is currently the prime cause of the recent occurrence  
15 of natural disasters; it also contributes in the increase of the area that is prone to natural disasters.  
16 This research is aimed to map the potential of areas around Pesanggrahan river in DKI Jakarta by  
17 segmenting the Digital Elevation Model derived from LIDAR data. The objective of this  
18 segmentation is to find the watershed lines of the DEM image. Data processing in this research is  
19 using LIDAR data which take the ground surface data, which is overlaid with Jakarta river map  
20 and subsequently, the data is then segmented the image. The expected result of the research is the  
21 flood potential area information, especially along the Pesanggrahan river in South Jakarta.

22 **Keywords:** Flood mapping; Urban flood potential; LIDAR; image segmentation; Digital Surface  
23 Model; Digital Elevation Model.

24

---

### 25 1. Introduction

26 Jakarta's rapid growth without sufficient water supply system results in high sub-surface water  
27 usage, which in turn causes land subsidence. Degradation of the city's drainage and sewer system,  
28 including downtown rivers further makes this complicated. Flood is concentration of water in the  
29 flat area around the river as a result of overflow of river water that cannot be accommodated by the  
30 river. In addition, flooding is a phenomenon that almost always happens every year in Jakarta. One  
31 aspect that is often overlooked is that the flood is closely related to the unity of the so-called  
32 watershed (Daerah Aliran Sungai or DAS) [1]. In addition to flooding, problems that occur in the  
33 watershed include increased erosion and sedimentation, reduced land productivity, and  
34 acceleration of land degradation and river water pollution [2-3].

35 This study aims to map flood-prone areas based on 5-year flood data that can clarify water level  
36 rise by using remote sensing data in the form of Digital Surface Model data as any existing surface  
37 shape such as tree height, buildings and any objects on the ground. This research is expected to  
38 compare the results of the DSM data segmentation as which will produce accurate data on the  
39 prediction of the flood. Remote Sensing is the science and art of obtaining information about an  
40 object, region or phenomenon through analysis of data obtained by a device without direct contact  
41 with the object, area or phenomenon under study [4].

42

43

44 **2. Materials and Methods**45 *2.1. Digital Surface Model*

46 DSM is a digital surface model or can be interpreted as a model of digital surface. DSM is also  
47 an elevation model that displays surface heights; DSM displays any existing surface shapes such as  
48 tree height, buildings and any objects on the ground. DSM is a system, model, method, and tool in  
49 collecting, processing, and presentation of terrain information. The arrangement of digital values  
50 representing the spatial distribution of the field characteristic, the spatial distribution represented by  
51 the values in the horizontal coordinate system x, y and the field characteristics are represented by  
52 the field altitude in the Z coordinate system [3].


53 One method to obtain surface model is through the use of Synthetic Aperture Radar (SAR)  
54 which uses radar reflection to determine the shape of the ground surface under the buildings,  
55 vegetation, and even water bodies [5, 6]. This work is also in conjunction with image  
56 processing-based flood early warning method using ALOS/PALSAR image [5], and to further extent  
57 is also supporting the research on land deformation in Jakarta city area [6, 7].

58 *2.2. Data Preparation*

59 The methods used in this study include surface height extraction from DSM data, incorporation  
60 of river map data with ground level data obtained from DSM data, and object classification with  
61 watershed segmentation technique on DSM data. In this study, the data used is digital data from the  
62 height of the surface (Digital Surface Model / DEM) in 2016 with a resolution of 1 meter. The map of  
63 the sub-district administrations in DKI Jakarta whose boundaries are represented by the color  
64 difference is shown in Figure 1. This DSM data will be processed with each parameter, namely:  
65 contour data, ground surface height, slope. The value of the surface contour has different color  
66 changes and the color will determine the height of the soil surface so that the expected result from  
67 the contour will produce ground level data.


68 In addition to DSM data, supporting data also used in this research is the image of Landsat 7  
69 satellite, where image data used is 1: 168,719 scale DKI Jakarta image obtained on May 2017 [8].  
70 Landsat image is taken from the official website of the United States Geological Survey (USGS). The  
71 data obtained will be identified to divide some of the criteria for land cover classes.

72 DKI Jakarta is categorized as a delta city, a city located at the mouth of a river that is generally  
73 below sea level, and quite vulnerable to climate change. Nevertheless, the existence of rivers and  
74 seas causes a delta city to have a strategic advantage, especially in terms of water transport. The  
75 delta city is generally below sea level, and quite vulnerable to climate change. The Watershed Map,  
76 Channel and Flood Way through Jakarta Region, can be seen in Figure 2.

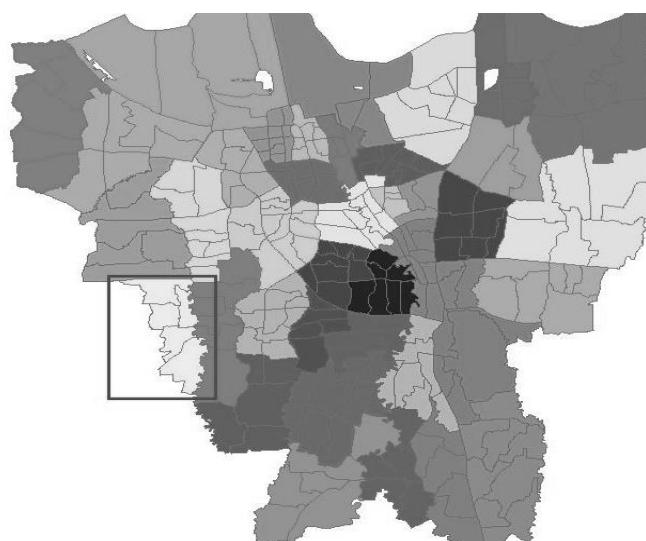

77  
78

**Figure 1.** DKI Jakarta Sub-District boundary map, each shade represents a District, with area of interest marked by a box

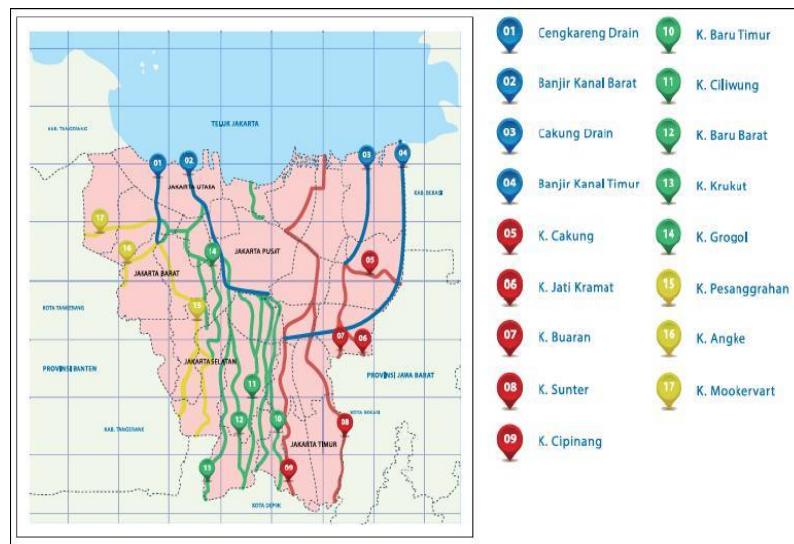79  
80  
81

**Figure 2.** Jakarta river map: Blue represent flood control rivers, Red represents rivers running through eastern part, Green for rivers through central part, and Yellow marked rivers in the western part of Jakarta

82  
83  
84  
85  
86  
87  
88  
89  
90

Pesanggrahan River, or locally known as Kali Pesanggrahan, passes through Bogor and Depok in West Java Province finally reaches South, West and North Jakarta. All Pesanggrahan Basin has a flat and elongated shape with several tributaries entering the main river. Kali Pesanggrahan has a river area of 142,500 km<sup>2</sup> with a length of 11,400 km. The initial capacity of Pesanggrahan River is 210 m<sup>3</sup>/s, condition of the river currently only 75 m<sup>3</sup>/s, while the flow that must be accommodated by Pesanggrahan River for the current 25-year period is 198.9 m<sup>3</sup>/s so that the runoff always occurs mainly due to backwater from Cengkareng Drain and overflow at Pesanggrahan River meeting and Angke River. With the addition of water discharge, the countermeasures by the public works office are needed for flood control in the western region today.

91

### 2.3. Mapping Method

92  
93  
94  
95  
96  
97  
98

Flood mapping method is done by using DSM (Digital Surface Model) data of DKI Jakarta which is result of contour data processing of Jakarta. DSM data is segmented by watershed segmentation method to get predicted flood potential. After obtaining the DSM segmentation result, then the data is registered to coordinate the corresponding position so as to facilitate further processing. The registered data is then cropped to determine the area of interest before conducting the analysis. The expected output of this process is information on potential floods along the Pesanggrahan River Basin located in South Jakarta Municipality [3].

99  
100  
101  
102  
103

DSM data as main data is processed by using ArcGIS application to get contour data and ground surface height. The results are then correlated to obtain the image of land cover in the Pesanggrahan area. After correlation processing results, the data were analyzed with field data of flood distribution. The expected output of this process is information on potential flooding along Pesanggrahan River Basin located in Pesanggrahan Sub district.

104  
105  
106  
107  
108  
109

Research methods can be divided into three stages of DSM data processing, data analysis and comparison of final results with actual flood data. The method used is the result of DSM contour data in Pesanggrahan District as well as the ground surface height of the local area then the data will be correlated with for later will be matched with field data.

110 *2.4. Land elevation and gradient*

111 Areas with higher ground elevation have less chance of flood events compared to lower regions  
 112 because water falling on the surface tends to flow to the lower regions where the accumulation of  
 113 water flow capacity that flows over the surface due to saturation water discharge in the soil. The  
 114 yield value of the slope class is determined where the higher slope of the land or the steeper the area  
 115 will cause less time for the rainwater to be filtered so that it will easily escape the flow of water  
 116 flowing over the surface due to the full capacity of the incoming water flow into the soil. While the  
 117 lower the value of the soil's soil or the flatter surface will cause the water to have a lot of time to  
 118 process the flow of water into the soil so that the capacity of the field more quickly fulfilled, thus the  
 119 possibility of the occurrence of larger puddles. So the flatter or small the value of the slope of the  
 120 land the value of the result is increasing.

121 *2.5. Land cover*

122 The type of land cover has different water capacity figures. The water capacity figures show  
 123 how large the portion of the rainfall will flow as the capacity of the stream surface. The growing  
 124 number of vegetation will increase the soil's ability to absorb rainwater that retains the flow rate of  
 125 water flow. Unlike the case with paddy fields that have water content in high field capacity so that  
 126 the ability to absorb water is lower. Especially when the surface of the built area covered by many  
 127 buildings and roads so that the surface is not exceeded by water resulted in high capacity water flow  
 128 that supports the occurrence of floods.

129 From the results of the data already obtained, then the data in the overlay to apply the  
 130 weighting of the values that already exist. Formulation of calculation of flood vulnerability that  
 131 includes: Soil Surface height, Soil Contour, and Land Cover is the formula as follows,


$$X = \sum_0^i (Bi \times Si) \quad (1)$$

132 X : Total result of flood vulnerability

133 Bi : The Weight of i-th Parameter

134 Si : The result of i-th parameter

135 The weight of each parameter in the determination of the flood vulnerability is determined  
 136 based on the parameters on the flood data that has been done. The greater the weight value of a  
 137 parameter indicates that the parameter has a great effect as well as vice versa.

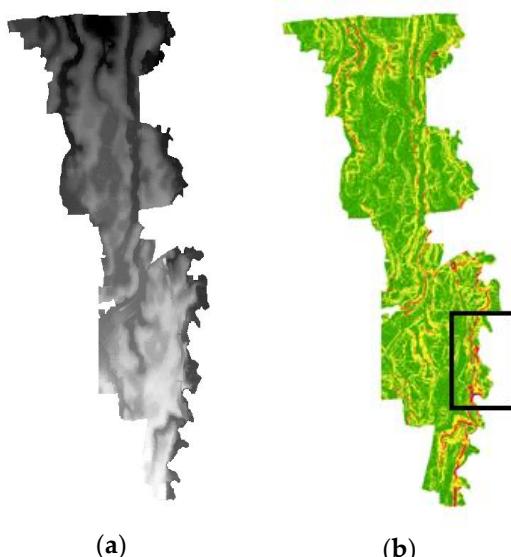
138 **3. Results**139 *3.1. Processing Surface Elevation Data*

140      **Figure 3.** Data for Pesanggrahan River: (a) LIDAR data and (b) color-coded Elevation data from  
141      LIDAR

142      Description of land surface height around Pesanggrahan area is obtained from DEM data  
143      processing. Figure 3 shows the results of the altitude data processing. The elevation of the soil  
144      surface in Pesanggrahan Region is relatively homogeneous because it is a flat area. From the results  
145      of the processed data, Pesanggrahan area is divided into 7 different color classification class that is  
146      dark green color has a ground level of less than 5m, light green color shows height between 5m-10m,  
147      light yellow color has a height of 10-15 m, 15-20 m long yellow, pink color has a height of 20-25 m,  
148      dark red has a height of 25m-30m, and the color purple has a height of more than 30 m [8].

149      *3.2. Deriving the contour data*


150      From the DEM data processing, we found the contour data of the land surface area around the  
151      Pesanggrahan River Basin. Figure 5 shows the results of processing from DEM data, so that from the  
152      data visible contour of ground surface soil in Pesanggrahan River Basin. In Figure 4, the results of  
153      processed data contours Pesanggrahan have different colors, namely bright red, dark red, yellow,  
154      green, blue, purple, and orange. Each color has a different value, where the value with the smallest is  
155      the lowest point value of the contour [8]. From the image of the line height (contour) of the soil  
156      surface has a contour line density which means it reflects the steep slope against the surface. Yellow  
157      color is the river, and red area shows the lowermost elevation that is very prone to flooding. Contour  
158      derivation shows that the elevation ranges from -4 m to 29 m.

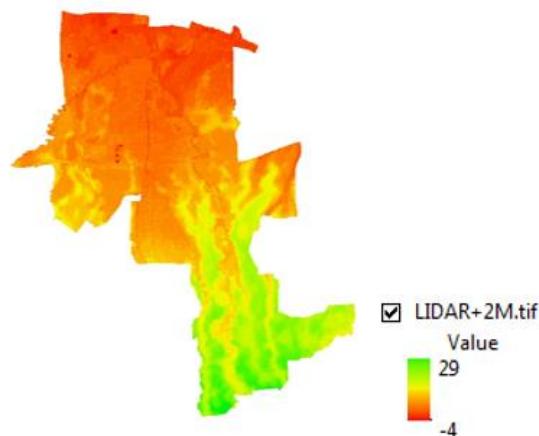

159      **Figure 4.** Detailed area of interest with color-coded elevation range

160      **4. Discussion**

161      The classification of elevation segmented into three categories, under 12 m; 12 to 17 m; and  
162      above 17 m. Plotting of the Pesanggrahan River's most prone areas from the southern border of DKI  
163      Jakarta to Jakarta-Tangerang Tollroad resulted in area of 332.4 hectares with the extent of flood from  
164      the riverbanks ranged between 300 m in the southern part to 600 m in the northern part. Areas  
165      around the toll road is a flat lowland which could disperse the water overflow. While this means  
166      shallow flooding, it covers much broader area and affected more residents. The flood vulnerability is  
167      shown in Figure 5 it also shows Government owned Oil and Gas Research Institute and Cipulir  
168      Market, a major textile market both located in the flood prone area.

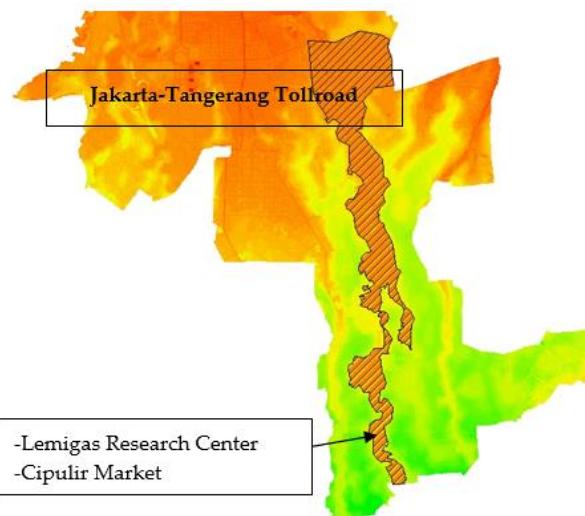

169                   **Figure 5.** Mapping of flood prone area of Pesanggrahan River from DKI Jakarta southern border to  
170                   Jakarta-Tangerang Tollroad

171                   **Acknowledgments:** The authors would like to thank Yayasan Pendidikan Budi Luhur Çakti for the funding of  
172                   the research and this publication.

173                   **Author Contributions:** Lestari Margatama and Indra Riyanto designed the research with guidance from Dr.  
174                   Dodi Sudiana and Prof. Josaphat Tetuko. Indra Riyanto and Babag Purbantoro performs the LIDAR Data  
175                   Segmentation with the guidance provided by Dr. Luhur Bayuaji. Lestari Margatama and Samsinar performs  
176                   the mapping of the segmented area.

177                   **Conflicts of Interest:** The authors declare no conflict of interest.  
178

179 **References**

- 180 1. Akbar, Y.M.; Musafa, A.; Riyanto, I. "Image Processing-based Flood Detection for Online Flood Early  
181 Warning System." Proceedings of the 6th Indonesia-Japan Joint Scientific Symposium, Yogyakarta,  
182 Indonesia, October 2014; Universitas Gadjah Mada: Yogyakarta, Indonesia.
- 183 2. Wihartini; Pramusinto, W.; Riyanto, I. "Mobile System to Support Flood Area Information Distribution."  
184 Proceedings of the 5th Indonesia-Japan Joint Scientific Symposium, Chiba, Japan, October 2012; Chiba  
185 University: Chiba, Japan.
- 186 3. Riyanto, I.; Margatama, L. "Study of Watershed Image Segmentation for Flood Potential Area Mapping in  
187 Jakarta. Case Study: Ciliwung River-West Banjir Kanal." Proceedings of Int. Conf. on Information  
188 Technology and Electrical Engineering, Yogyakarta, Indonesia, 28 July 2011, Universitas Gadjah Mada:  
189 Yogyakarta, Indonesia, pp. 52-55.
- 190 4. Riyanto, I.; Sudiana, D. "Pemetaan Daerah Potensi Banjir Dengan Segmentasi Data Digital Elevation  
191 Model {Studi Kasus: DAS Ciliwung di DKI Jakarta 2007}." Master Thesis, Universitas Indonesia, Depok,  
192 2009.
- 193 5. Sudiana, D.; Rizkinia, M. "ALOS/PALSAR Image Processing Using Dinsar and Log Ratio for Flood Early  
194 Detection in Jakarta Based on Land Subsidence." *Makara J. of Technology* 2012, Vol. 15, Issue 2, pp. 193-200.
- 195 6. Putri, R.F.; Bayuaji, L.; Sumantyo, J.T.S.; Kuze, H. "TerraSAR-X Dinsar for Land Deformation Detection in  
196 Jakarta Urban Area, Indonesia." *J. of Urban and Environmental Engineering* 2013, Vol. 7, Issue 2, pp. 195-205.
- 197 7. Bayuaji, L.; Sumantyo, J.T.S.a; Kuze, H. "ALOS PALSAR D-InSAR for Land Subsidence Mapping in  
198 Jakarta, Indonesia." *Can. J. Remote Sensing* 2010, Vol. 36, No. 1, pp. 1-8.
- 199 8. Margatama, L.; Al-Hikmah, S.S.; Riyanto, I.; Samsinar; Pebrianti, D.; Bayuaji, L.; Sudiana, D.; Sumantyo,  
200 J.T.S. "Increasing Disaster Awareness of the Community by Flood Potential Mapping of  
201 Densely-Populated Urban River Watershed in South and West Jakarta with LIDAR Data Segmentation."  
Proceedings of the IEEE Int. Conf. on Applied System Innovation, Chiba, Japan, April 2018; Taiwanese  
202 Institute of Knowledge and Innovation: Tainan, Taiwan (R.O.C.)