

Article

Not peer-reviewed version

Numerical Analysis of the Effect of Magnetic Field and Heat Transfer on Plasma Through an Asymmetric Non-Uniform Channel

Lilian Moseti^{*}, [Joash Kerongo](#), Vincent Bulinda

Posted Date: 23 April 2023

doi: 10.20944/preprints202304.0769.v1

Keywords: magnetic field; heat transfer; Finite Difference Method; Blood Plasm; Asymmetric segment



Preprints.org is a free multidiscipline platform providing preprint service that is dedicated to making early versions of research outputs permanently available and citable. Preprints posted at Preprints.org appear in Web of Science, Crossref, Google Scholar, Scilit, Europe PMC.

Copyright: This is an open access article distributed under the Creative Commons Attribution License which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

Article

Numerical Analysis of the Effect of Magnetic Field and Heat Transfer on Plasma through an Asymmetric Non-uniform Channel

Lilian Moraa Moseti ^{1,*}, Kerongo Joash ² and Vincent Bulinda ³

¹ Department of mathematics and actuarial science- (Kisii University); lilianmoseti11@gmail.com

² Department of mathematics and actuarial science- (Kisii University); jkerongo@kisiuniversity.ac.ke

³ Department of mathematics and actuarial science- (Kisii University); vbulinda@kisiuniversity.ac.ke

* Correspondence: lilianmoseti11@gmail.com

Abstract: Theoretical approaches were applied to study the effect of magnetic field and heat transfer on the flow of blood plasma through an asymmetric arterial segment. The plasma was considered to be unsteady, laminar and an incompressible fluid through non-uniform arterial segment in a two-dimensional flow. Axial velocity, pressure gradient, stream function and pressure shift per wavelength were evaluated in blood plasma flow in arteries by use of coupled linear partial differential equations, solved with the help of Finite difference method. The corresponding initial and boundary conditions were obtained by discretizing the flow channel. The effect of magnetic field on blood plasma in arteries was determined by creating a magnetic field gradient through the application of a varying strength of magnetic field on the flow. Heat transfer characteristics due to applied magnetic field and viscosity of blood was obtained by use of linear partial differential equations to determine varying temperature conditions in heat transfer characteristics. Numerical results for velocity profiles, magnetic profiles and temperature profiles were obtained to characterize blood plasma viscosity by use of various non-dimensional parameters. The results were graphically presented using MATLAB software. The results obtained helped in analyzing theoretically the effects of magnetic field and heat transfer in arterial plasma flow.

Keywords: magnetic field; heat transfer; finite difference method; blood plasma; Asymmetric segment

1.0. Introduction

Blood Plasma is a fluid which constitutes the liquid part of mammalian blood. Blood plasma is considered as MHD consisting of an aqueous and magnetic fluid of organic substances such as proteins and electrolytes. Similar to water, plasma behaves as a Newtonian Fluid whose viscosity depends on temperature. Its main function in blood is to transport nutrients to the cells of various body organs as well as for transporting waste products resulting from cell metabolic activities to excretory organs such as the liver, kidney and lungs. It also serves as a transport medium for blood cells. Plasma plays an important role in maintaining normal blood pressure in the body. Moreover, Plasma helps to spread heat throughout the body and to maintain biological stability, such as acid-base balance in the blood (Sinha A., Misra J.C., Shit G.C., 2016).

Blood Plasma Flow (BPF) through the body is regulated by three main factors: the size of blood vessels, the action of smooth muscle and by the fluid pressure of the plasma itself. BPF is vital for maintaining life and the factors that govern plasma flow are pressure, the resistance to flow, blood viscosity cardiac output, compliance, blood volume, blood viscosity, the length and diameter of the blood vessels. These characteristics of blood plasma together with the motion of the arterial wall, play an important role in the physiology of the cardiovascular system. The BPF in human arterial system can be considered as a fluid dynamics problem. Therefore, there is need to look at ways to improve and avoid risks of heart diseases in the circulatory system (Abubakar J.U. and Adeoye A.D., 2020).

Simulation of BPF in the arterial network system provides a better understanding of the physiology of human body. Simulation studies of plasma flow in the diseased condition can diagnose the health problem easily and also have many applications in areas such as surgical planning and design of medical devices (Jiangye Li, Hulin Huang2010).

Magnetic fields can reduce blood viscosity, a leading cause of heart attack and strokes. Strong magnetic fields can dramatically reduce the thickness or viscosity of BPF. The magnetic effect all comes down to hemoglobin, the iron-based protein inside red blood cells. In the same way that iron filings align themselves along the field lines around a bar magnet, so the red blood cells align themselves along the straight field lines of electromagnet. This reduces viscosity in several ways. For one, the cells become streamlined with the direction of flow. The alignment also encourages the cells to stick together, forming clumps of various sizes (Akar1, S. *et al.*, 2019).

Heat transfer concerns the generation, use, conversion and exchange of thermal energy between physical systems. Circulation of blood transfers heat between tissues and the dimensions of the blood vessels are various, whenever more blood plasma is needed in some vessels of the body due to more activity, these blood vessels expand to supply the required blood while other vessels tight to compensate it. The arterioles, capillaries and venules act as perfect heat exchangers in which the blood quickly reaches the tissue temperature (Jahangir Alam, *et al.*, 2021).

Heat increases blood flow by expanding blood vessels. It increases blood plasma flow to a specific area and improves circulation. Increased blood flow can help relax a tight muscle, restore movement and reduce pain. Heat eases stiffness after inflammation has resolved. This is because heat on an inflamed area causes the blood vessels to dilate, promoting blood flow to the injured area. Applying heat to an affected area can provide comfort and increase muscle flexibility, as well as heal damaged tissues. Heat boosts the flow of blood plasma and nutrients to an area of the body. It often works best for morning stiffness or to warm up muscles before activity (Phyllis Mumbi Macharia, 2018).

This paper is organized as follows. First, the background to the study is described in section1. Then, the governing mathematical principles and equations are given in section 2, model formulation and applications are presented in section 3, results and discussion on results is provided in section 4, summary and conclusion in section 5, and recommendations in section 6.

2.0. Background

The blood plasma behaves as an electrically conducting fluid exhibiting magnetization. The electrical conductivity of blood is sensitive to the temperature which makes it not to be constant. The characteristics of flow and heat transfer in arteries are extremely useful to understand in relation to design of different heat exchangers and chemical processing equipment. Similar situations prevail in wire and fiber coating, transpiration cooling, food stuff processing, reactor fluidization and manufacture of plastic and rubber sheets. Primary objective of this study is to maintain steady laminar flow of the fluid in arteries and understand the possible effects of non-steady flow and how to clear these effects (Maxwell, B.H. and Ralph Baierlein, 2000).

Magnetic field and heat transfer effects help to reduce blood plasma viscosity, high blood pressure and accumulation of cholesterol in the body which are causes of cardiovascular diseases. The common method used to reduce the blood viscosity is through medication, such as aspirin. In our work we are going to find out how magnetic field and heat transfer enhance the flow of blood plasma in the body. Previous studies on the effect of magnetic field on blood plasma flow through arteries using one dimension model equations have been done with little attention to magnetic field and heat transfer effect in asymmetrical non-uniform arteries. In this study we will consider a 2-dimensional flow model in which blood plasma will be considered to be laminar, unsteady and incompressible. To adequately describe blood plasma flow in circulatory systems there is need to use the mathematical theoretical approach to study effect of magnetic field and heat transfer on blood plasma taking into consideration an asymmetric non-uniform arterial channel of flow (Shit, G. C., and Sreeparna Majee, 2020).

Simulation studies of blood plasma flow in the diseased condition can diagnose the health problem easily and also have many applications in the areas such as surgical planning and design of medical devices. Magnetic field application reduces rate of flow of blood in human arterial system, which is useful in treatment of certain cardiovascular and in the problems which increase the rate of circulation of blood like hemorrhage and hypertension.

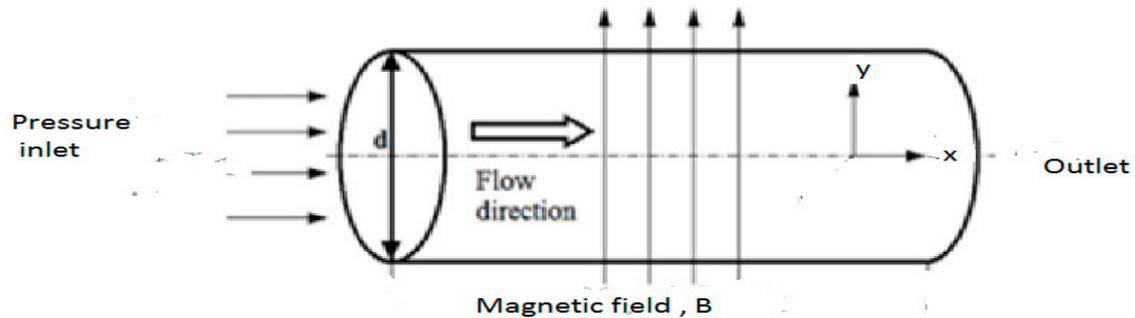


Figure 1.1. Physical configuration of the model problem.

3.0. Governing Equations and Method of Solution

The governing equations were presented based on the following assumptions on blood plasma.

- Plasma is considered to be Newtonian,
- Blood plasma is incompressible,
- Plasma is homogeneous and a viscous fluid.

The above assumptions explain the unsteady flow of blood in the presence of magnetic field governed by two-dimensional boundary layer equations where u and v are the velocity components in the direction of x and y , respectively at time t in the flow field.

Continuity Equation

$$\frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} = 0 \quad (3.1)$$

Momentum Equation

$$x - \text{direction}, \quad \rho \left(\frac{\partial u}{\partial t} + u \frac{\partial u}{\partial x} + v \frac{\partial u}{\partial y} \right) = - \frac{\partial P}{\partial x} + \mu \left(\frac{\partial^2 u}{\partial x^2} + \frac{\partial^2 u}{\partial y^2} \right) + \rho g_x \quad (3.2)$$

$$y - \text{direction}, \quad \rho \left(\frac{\partial v}{\partial t} + u \frac{\partial v}{\partial x} + v \frac{\partial v}{\partial y} \right) = - \frac{\partial P}{\partial y} + \mu \left(\frac{\partial^2 v}{\partial x^2} + \frac{\partial^2 v}{\partial y^2} \right) + \rho g_y \quad (3.3)$$

Energy Equations

$$\rho C_p \left(\frac{\partial T}{\partial t} + u \frac{\partial T}{\partial x} + v \frac{\partial T}{\partial y} \right) = \kappa \left(\frac{\partial^2 T}{\partial x^2} + \frac{\partial^2 T}{\partial y^2} \right) + \varphi \theta, \quad (3.4)$$

$$\varphi = \mu \left\{ 2 \left[\left(\frac{\partial u}{\partial x} \right)^2 + \left(\frac{\partial v}{\partial y} \right)^2 + \left[\frac{\partial u}{\partial y} + \frac{\partial v}{\partial x} \right]^2 - \frac{2}{3} (\text{div}.u)^2 \right] \right\}, \quad (3.5)$$

where, ρ is the density of the blood while p stands for pressure. C_p is the specific heat at constant pressure, T is the temperature and φ is the viscous dissipation.

Concentration Equation

$$\frac{\partial C}{\partial t} + u \frac{\partial C}{\partial x} + v \frac{\partial C}{\partial y} = D \frac{\partial^2 C}{\partial x^2} + D \frac{\partial^2 C}{\partial y^2}, \quad (3.6)$$

where, C is concentration and D is the diffusion term.

3.3. Discretizing the Momentum Equation

Using equations (3.2) and (3.3) above, the following momentum equation (3.7) was obtained and applied to investigate the velocity of blood plasma in arteries.

$$\frac{\partial u}{\partial t} + u \frac{\partial u}{\partial x} + v \frac{\partial u}{\partial y} = \left(\frac{\partial^2 u}{\partial x^2} + \frac{\partial^2 u}{\partial y^2} \right) + Gr\theta + M^2 u \quad (3.7)$$

Applying the central space scheme (CS), the values u_t were replaced by forward difference approximation while u_{xx} and u_{yy} were replaced by central difference approximation. When these values were substituted into the partial derivatives appearing in (3.7) to obtain a Forward Time central space scheme provided in equation (3.8) below:

$$\begin{aligned} & \left[\frac{U_{i,j}^{n+1} - U_{i,j}^n}{\Delta t} \right] + \left[\frac{U_{i+1,j}^n - U_{i-1,j}^n}{2\Delta x} \right] + \left[\frac{U_{i,j+1}^n - U_{i,j-1}^n}{2\Delta y} \right] \\ & = \left[\frac{U_{i+1,j}^n - 2U_{i,j}^n + U_{i-1,j}^n}{(\Delta x)^2} \right] + \left[\frac{U_{i,j+1}^n - 2U_{i,j}^n + U_{i,j-1}^n}{(\Delta y)^2} \right] \\ & \quad + M^2 \left[\frac{U_{i+1,j}^n + U_{i,j}^n}{2} \right] + Gr\theta \end{aligned} \quad (3.8)$$

The effects of M and Gr on the axial blood plasma velocity were investigated using equation (3.9) obtained by setting $\Delta t = 0.01$ and $\Delta x = \Delta y = 0.01$ and $\theta = 1$, yielding

$$\begin{aligned} (2.1 + 0.01M^2)U_{i+1,j}^n + (0.01M^2 - 7)U_{i,j}^n + 0.8U_{i-1,j}^n \\ = -2.1U_{i,j}^{n+1} - 0.8U_{i,j-1}^n - 4U_{i,j}^n + 0.02Gr \end{aligned} \quad (3.9)$$

Taking $i = 1, 2, 3, \dots, 5$, $n = 0$ and $j = 1$, a system of linear algebraic equations given in equation (3.10) was formed.

$$\left. \begin{aligned} (2.1 + 0.01M^2)U_{2,1}^0 + (0.01M^2 - 7)U_{1,1}^0 + 0.8U_{0,1}^0 &= -2.1U_{1,2}^0 - 0.8U_{1,0}^0 - 4U_{1,1}^1 + 0.02Gr \\ (2.1 + 0.01M^2)U_{3,1}^0 + (0.01M^2 - 7)U_{2,1}^0 + 0.8U_{1,1}^0 &= -2.1U_{2,2}^0 - 0.8U_{2,0}^0 - 4U_{2,1}^1 + 0.02Gr \\ (2.1 + 0.01M^2)U_{4,1}^0 + (0.01M^2 - 7)U_{3,1}^0 + 0.8U_{2,1}^0 &= -2.1U_{3,2}^0 - 0.8U_{3,0}^0 - 4U_{3,1}^1 + 0.02Gr \\ (2.1 + 0.01M^2)U_{5,1}^0 + (0.01M^2 - 7)U_{4,1}^0 + 0.8U_{3,1}^0 &= -2.1U_{4,2}^0 - 0.8U_{4,0}^0 - 4U_{4,1}^1 + 0.02Gr \\ (2.1 + 0.01M^2)U_{6,1}^0 + (0.01M^2 - 7)U_{5,1}^0 + 0.8U_{4,1}^0 &= -2.1U_{5,2}^0 - 0.8U_{5,0}^0 - 4U_{5,1}^1 + 0.02Gr \end{aligned} \right\} \quad (3.10)$$

Applying initial conditions $U_{i,0}^0 = U_{i,j}^0 = 1$, and boundary conditions $U_{1,1}^1 = 0$, an augmented matrix in equation (3.11) below was obtained from the set of algebraic equations (3.10).

$$\begin{aligned} & \begin{bmatrix} (0.01M^2 - 7) & (2.1 + 0.01M^2) & 0 & 0 & 0 \\ 0.8 & (0.01M^2 - 7) & (2.1 + 0.01M^2) & 0 & 0 \\ 0 & 0.8 & (0.01M^2 - 7) & (2.1 + 0.01M^2) & 0 \\ 0 & 0 & 0.8 & (0.01M^2 - 7) & (2.1 + 0.01M^2) \\ 0 & 0 & 0 & 0.8 & (0.01M^2 - 7) \end{bmatrix} \begin{bmatrix} U_{1,1} \\ U_{2,1} \\ U_{3,1} \\ U_{4,1} \\ U_{5,1} \end{bmatrix} \\ & = \begin{bmatrix} -16 + 0.02Gr \\ -8 + 0.02Gr \\ -8 + 0.02Gr \\ -8 + 0.02Gr \\ -8 + 0.02Gr \end{bmatrix} \end{aligned} \quad (3.11)$$

3.3. Discretization of Energy Equation

Equation (3.4) can be rewritten as

$$U \frac{\partial \theta}{\partial x} + V \frac{\partial \theta}{\partial y} = \left[\frac{\partial^2 \theta}{\partial x^2} + \frac{\partial^2 \theta}{\partial y^2} \right] + \varphi\theta \quad (3.12)$$

Equation (3.12) was used to investigate the blood plasma temperature distribution. For the central scheme (CDS), the values, θ_x , θ_y , θ_{xx} and θ_{yy} were replaced by central difference approximation, yielding

$$u \left(\frac{\theta_{i+1,j} - \theta_{i-1,j}}{2\Delta x} \right) + v \left(\frac{\theta_{i,j+1} - \theta_{i,j-1}}{2\Delta y} \right) = \left(\frac{\theta_{i+1,j} - 2\theta_{i,j} + \theta_{i-1,j}}{(\Delta x)^2} + \frac{\theta_{i+1,j+1} - 2\theta_{i,j+1} + \theta_{i-1,j+1}}{(\Delta y)^2} \right) + \varphi \theta_{i,j} \quad (3.13)$$

Setting $u = v = N_c = \theta = 1$, and multiplying both sides of equation (3.13) by $2(\Delta x)$, and letting $Pr = 0.71$ and taking $\Delta x = \Delta y = 0.1$ on a square mesh into equation (3.13) the following scheme in equation (3.14) results,

$$-19\theta_{i+1,j} + (80 - 0.2\varphi)\theta_{i,j} - 21\theta_{i-1,j} = 19\theta_{i,j+1} + 21\theta_{i,j-1} \quad (3.14)$$

Taking and $i = 1, 2, 3, \dots, 5$ and $j = 1$, the following systems of linear algebraic equations (3.16) yields,

$$\begin{aligned} -19\theta_{2,1} + (80 - 0.2\varphi)\theta_{1,1} - 121\theta_{0,1} &= 19\theta_{1,2} + 21\theta_{1,0} \\ -19\theta_{3,1} + (80 - 0.2\varphi)\theta_{2,1} - 21\theta_{1,1} &= 19\theta_{2,2} + 21\theta_{2,0} \\ -19\theta_{4,1} + (80 - 0.2\varphi)\theta_{3,1} - 21\theta_{2,1} &= 19\theta_{3,2} + 21\theta_{3,0} \\ -19\theta_{5,1} + (80 - 0.2\varphi)\theta_{4,1} - 21\theta_{3,1} &= 19\theta_{4,2} + 21\theta_{4,0} \\ -19\theta_{6,1} + (80 - 0.2\varphi)\theta_{5,1} - 21\theta_{4,1} &= 19\theta_{5,2} + 21\theta_{5,0} \end{aligned} \quad (3.15)$$

Setting initial and boundary conditions $\theta_{i,0} = \theta_{0,j} = 10$ and $\theta_{i,2} = 0$, respectively, the above algebraic equations (3.15) can be written in augmented as

$$\begin{bmatrix} (8 - 0.2\varphi) & 0.86 & 0 & 0 & 0 \\ -1.4 & (8 - 0.2\varphi) & 0.86 & 0 & 0 \\ 0 & -1.4 & (8 - 0.2\varphi) & 0.86 & 0 \\ 0 & 0 & -1.4 & (8 - 0.2\varphi) & 0.86 \\ 0 & 0 & 0 & -1.4 & (8 - 0.2\varphi) \end{bmatrix} \begin{bmatrix} \theta_{1,1} \\ \theta_{2,1} \\ \theta_{3,1} \\ \theta_{4,1} \\ \theta_{5,1} \end{bmatrix} = \begin{bmatrix} 1420 \\ 210 \\ 210 \\ 210 \\ 210 \end{bmatrix} \quad (3.16)$$

3.4. Discretizing the Concentration Equation

A dimensionalized form of the concentration (or advection-diffusion equation) of equation (3.6) is given as

$$\frac{\partial C}{\partial t} + u \frac{\partial C}{\partial x} + v \frac{\partial C}{\partial y} = \frac{1}{Pe} \left(\frac{\partial^2 C}{\partial x^2} + \frac{\partial^2 C}{\partial y^2} \right), \quad (3.17)$$

where $u(x, y, t)$ and $v(x, y, t)$ are the given divergence-free advective velocity vector fields along x and y directions, respectively, while t is time and $C(x, y, t)$ is the blood plasma concentration levels in arteries.

But the Peclet number is given by

$$Pe = \frac{UL}{D}, \quad (3.18)$$

where, U is a axial velocity, L is arterial length, and D is the diffusivity of the blood plasma.

Substituting (3.18) into (3.17) gives

$$\frac{\partial C}{\partial t} + u \frac{\partial C}{\partial x} + v \frac{\partial C}{\partial y} = \frac{D}{UL} \left(\frac{\partial^2 C}{\partial x^2} + \frac{\partial^2 C}{\partial y^2} \right) \quad (3.19)$$

The partial differential equation (3.19) was discretized to form a central scheme provided in equation (3.20) which eventually solved using the finite difference method to determine the effects of diffusivity (D) arterial length (L) and axial velocity (U) for blood plasma concentration levels. Using a central difference numerical scheme, C_t was replaced by forward difference scheme while C_{xx} , and C_{yy} were replaced by central difference approximation. Substituting these approximations into equation (3.19), and letting $u = v = 1$ the following equation (3.20) was obtained.

$$\frac{C_{i,j}^{n+1} - C_{i,j}^n}{\Delta t} + \frac{C_{i+1,j}^n - C_{i-1,j}^n}{2\Delta x} + \frac{C_{i,j+1}^n - C_{i,j-1}^n}{2\Delta y} = \frac{D}{UL} \left[\frac{C_{i+1,j}^n - 2C_{i,j}^n + C_{i-1,j}^n}{(\Delta x)^2} + \frac{C_{i,j+1}^n - 2C_{i,j}^n + C_{i,j-1}^n}{(\Delta y)^2} \right] \quad (3.20)$$

Taking $\varphi = \frac{\Delta t}{(\Delta x)} = \frac{\Delta t}{(\Delta y)}$, $\mu = \frac{\Delta t}{(\Delta x)^2} = \frac{\Delta t}{(\Delta y)^2}$, $\xi = \frac{D}{UL}$, $\Delta x = \Delta y$ and multiplying by $2\Delta t$ throughout equation (3.20) and re-arranging, the following scheme in equation (3.21) yields

$$(\varphi - \mu\xi)C_{i+1,j}^n - (\varphi + \mu\xi)C_{i-1,j}^n + (2\mu\xi - 2)C_{i,j}^n = (\mu\xi - \varphi)C_{i,j+1}^n + (\mu\xi + \varphi)C_{i,j-1}^n - 2C_{i,j}^{n+1} \quad (3.22)$$

Taking $\Delta x = \Delta y = 0.1$, and $\Delta t = 0.01$, $\Rightarrow \varphi = 0.1$ and $\mu = 2$ results to the following central difference scheme in equation (3.23).

$$(0.1 - 2\xi)C_{i+1,j}^n - (0.1 + 2\xi)C_{i-1,j}^n + (4\xi - 2)C_{i,j}^n = (2\xi - 0.1)C_{i,j+1}^n + (2\xi + \varphi)C_{i,j-1}^n - 2C_{i,j}^{n+1} \quad (3.23)$$

For $i = 1, 2, \dots, 6, j = 1$ and $n = 0$ the following algebraic equations (3.24) arise from the above central difference scheme in equation (3.23).

$$\left. \begin{aligned} (0.1 - 2\xi)C_{2,1}^0 - (0.1 + 2\xi)C_{0,1}^0 + (4\xi - 2)C_{1,1}^0 &= (2\xi - 0.1)C_{1,2}^0 + (2\xi + \varphi)C_{1,0}^0 - 2C_{1,1}^1 \\ (0.1 - 2\xi)C_{3,1}^0 - (0.1 + 2\xi)C_{1,1}^0 + (4\xi - 2)C_{2,1}^0 &= (2\xi - 0.1)C_{2,2}^0 + (2\xi + \varphi)C_{2,0}^0 - 2C_{2,1}^1 \\ (0.1 - 2\xi)C_{4,1}^0 - (0.1 + 2\xi)C_{2,1}^0 + (4\xi - 2)C_{3,1}^0 &= (2\xi - 0.1)C_{3,2}^0 + (2\xi + \varphi)C_{3,0}^0 - 2C_{3,1}^1 \\ (0.1 - 2\xi)C_{5,1}^0 - (0.1 + 2\xi)C_{3,1}^0 + (4\xi - 2)C_{4,1}^0 &= (2\xi - 0.1)C_{4,2}^0 + (2\xi + \varphi)C_{4,0}^0 - 2C_{4,1}^1 \\ (0.1 - 2\xi)C_{6,1}^0 - (0.1 + 2\xi)C_{4,1}^0 + (4\xi - 2)C_{5,1}^0 &= (2\xi - 0.1)C_{5,2}^0 + (2\xi + \varphi)C_{5,0}^0 - 2C_{5,1}^1 \\ (0.1 - 2\xi)C_{7,1}^0 - (0.1 + 2\xi)C_{5,1}^0 + (4\xi - 2)C_{6,1}^0 &= (2\xi - 0.1)C_{6,2}^0 + (2\xi + \varphi)C_{6,0}^0 - 2C_{6,1}^1 \\ (0.1 - 2\xi)C_{8,1}^0 - (0.1 + 2\xi)C_{6,1}^0 + (4\xi - 2)C_{7,1}^0 &= (2\xi - 0.1)C_{7,2}^0 + (2\xi + \varphi)C_{7,0}^0 - 2C_{7,1}^1 \end{aligned} \right\} \quad (3.24)$$

The algebraic equations in equation (3.24) results to the following augmented matrix in equation (3.25).

$$\begin{bmatrix} (4\xi - 2) & (0.1 - 2\xi) & 0 & 0 & 0 & 0 \\ -(0.1 + 2\xi) & (4\xi - 2) & (0.1 - 2\xi) & 0 & 0 & 0 \\ 0 & -(0.1 + 2\xi) & (4\xi - 2) & (0.1 - 2\xi) & 0 & 0 \\ 0 & 0 & -(0.1 + 2\xi) & (4\xi - 2) & (0.1 - 2\xi) & 0 \\ 0 & 0 & 0 & -(0.1 + 2\xi) & (4\xi - 2) & (0.1 - 2\xi) \\ 0 & 0 & 0 & 0 & -(0.1 + 2\xi) & (4\xi - 2) \end{bmatrix} \begin{bmatrix} C_{1,1}^0 \\ C_{2,2}^0 \\ C_{3,3}^0 \\ C_{4,4}^0 \\ C_{5,5}^0 \\ C_{6,6}^0 \end{bmatrix} = \begin{bmatrix} -2C_{1,1}^1 \\ -2C_{1,2}^1 \\ -2C_{1,3}^1 \\ -2C_{1,4}^1 \\ -2C_{1,5}^1 \\ -2C_{1,6}^1 \end{bmatrix} \quad (3.25)$$

The following initial conditions in equation (3.26) and boundary conditions in equation (3.27) were considered on the flow region,

$$C(x,y,0) = 0, \quad t=0 \quad (3.26)$$

$$C(0,y,t) = 0, \quad C(x,y,L) = e^t, \quad t > 0, \quad x \neq y \quad (3.27)$$

Inserting the above initial and boundary conditions into equation (3.25) gives,

$$\begin{bmatrix} (4\xi - 2) & (0.1 - 2\xi) & 0 & 0 & 0 & 0 \\ -(0.1 + 2\xi) & (4\xi - 2) & (0.1 - 2\xi) & 0 & 0 & 0 \\ 0 & -(0.1 + 2\xi) & (4\xi - 2) & (0.1 - 2\xi) & 0 & 0 \\ 0 & 0 & -(0.1 + 2\xi) & (4\xi - 2) & (0.1 - 2\xi) & 0 \\ 0 & 0 & 0 & -(0.1 + 2\xi) & (4\xi - 2) & (0.1 - 2\xi) \\ 0 & 0 & 0 & 0 & -(0.1 + 2\xi) & (4\xi - 2) \end{bmatrix} \begin{bmatrix} C_{1,1}^0 \\ C_{2,2}^0 \\ C_{3,3}^0 \\ C_{4,4}^0 \\ C_{5,5}^0 \\ C_{6,6}^0 \end{bmatrix} = \begin{bmatrix} -5.4365 \\ -14.778 \\ -40.1707 \\ -109.196 \\ -296.826 \\ -806.857 \end{bmatrix} \quad (3.28)$$

Substituting $\xi = \frac{D}{UL}$ into (3.28) gives

$$\begin{bmatrix} \left(\frac{4D}{UL} - 2\right) & \left(0.1 - \frac{2D}{UL}\right) & 0 & 0 & 0 & 0 \\ -\left(0.1 + \frac{2D}{UL}\right) & \left(\frac{4D}{UL} - 2\right) & \left(0.1 - \frac{2D}{UL}\right) & 0 & 0 & 0 \\ 0 & -\left(0.1 + \frac{2D}{UL}\right) & \left(\frac{4D}{UL} - 2\right) & \left(0.1 - \frac{2D}{UL}\right) & 0 & 0 \\ 0 & 0 & -\left(0.1 + \frac{2D}{UL}\right) & \left(\frac{4D}{UL} - 2\right) & \left(0.1 - \frac{2D}{UL}\right) & 0 \\ 0 & 0 & 0 & -\left(0.1 + \frac{2D}{UL}\right) & \left(\frac{4D}{UL} - 2\right) & \left(0.1 - \frac{2D}{UL}\right) \\ 0 & 0 & 0 & 0 & -\left(0.1 + \frac{2D}{UL}\right) & \left(\frac{4D}{UL} - 2\right) \end{bmatrix} \begin{bmatrix} C_{1,1}^0 \\ C_{2,2}^0 \\ C_{3,3}^0 \\ C_{4,4}^0 \\ C_{5,5}^0 \\ C_{6,6}^0 \end{bmatrix} = \begin{bmatrix} -5.4365 \\ -14.778 \\ -40.1707 \\ -109.196 \\ -296.826 \\ -806.857 \end{bmatrix} \quad (3.29)$$

3.4. Method of Solution

Numerical schemes were developed using Finite Difference Scheme (FDS). The Finite Difference method was used to solve the developed coupled partial differential equations governing the flow of blood plasma. Conditions associated with the concepts of stability, convergency, accuracy and consistency were applied on the solution of the obtained finite difference equations for accurate approximation of the solution. The results were presented for different parameters under investigation and compared. MATLAB software was used to solve the governing equations and to plot graphs.

4.0. Results

The simulation results obtained in this study focus on the effects of the D, U, L, ϕ, Gr and M on blood plasma Concentration levels, temperature distribution and velocity profiles.

4.1. Effects of Diffusion Coefficient on blood plasma Concentration level

Equation (3.29) was solved using MATLAB and results obtained for the effects of Diffusion Coefficient (D) on blood plasma concentration levels were recorded as shown in Table 4.1 below.

Table 4.1. Value of blood plasma concentration level for varying Diffusion Coefficient.

Diffusion Coefficient	Arterial length					
	0	1	2	3	4	5
$D = 2 \mu\text{mm}^2 / \text{sec}$	0.0596	0.156324	0.424341	1.15287	3.12906	10.006
$D = 3 \mu\text{mm}^2 / \text{sec}$	0.05865	0.14886	0.40612	1.10599	2.97345	9.4003
$D = 4 \mu\text{mm}^2 / \text{sec}$	0.05776	0.14133	0.38913	1.05206	2.7774	8.9107
$D = 5 \mu\text{mm}^2 / \text{sec}$	0.0569	0.1424	0.38609	1.0317	2.6857	8.3767

The above results were presented in Figure 4.1 provided below.

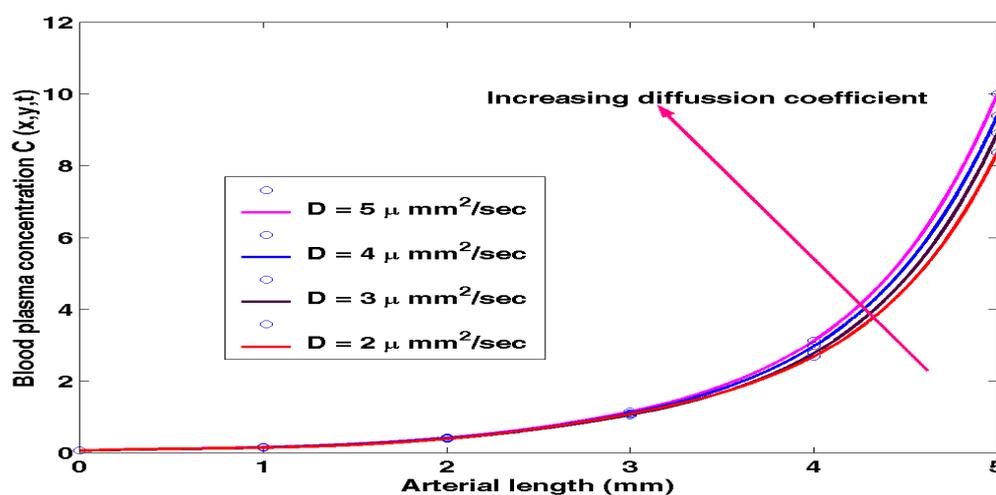


Figure 4.1. Graph of blood plasma concentration against arterial length at varying Diffusion Coefficient.

The effect of diffusivity coefficient can be observed from Figure 4.1. Increase in diffusion coefficient leads to increases in the blood plasma concentration levels.

4.2. Effects of Characteristic Length on blood plasma Concentration level

Again, equation (3.29) was numerically solved using MATLAB and the results obtained were provided in Table 4.2 to show the effects of characteristic length L on blood plasma Concentration level.

Table 4.2. Value of blood plasma Concentration level for varying arterial Length.

Arterial Length	Plasma Concentration level $C(x,y,t)$					
	0	1	2	3	4	5
L = 3mm	0.05895	0.15555	0.423953	1.152231	3.129287	8.777
L = 4mm	0.0276544	0.072185	0.196123	0.53332	1.444405	4.16810
L = 5mm	0.02398	0.06245	0.169742	0.45769	1.194612	2.65299
L = 6mm	0.015433	0.041544	0.11719	0.303467	0.8177	2.02474

The above results were presented in Figure 4.2 below

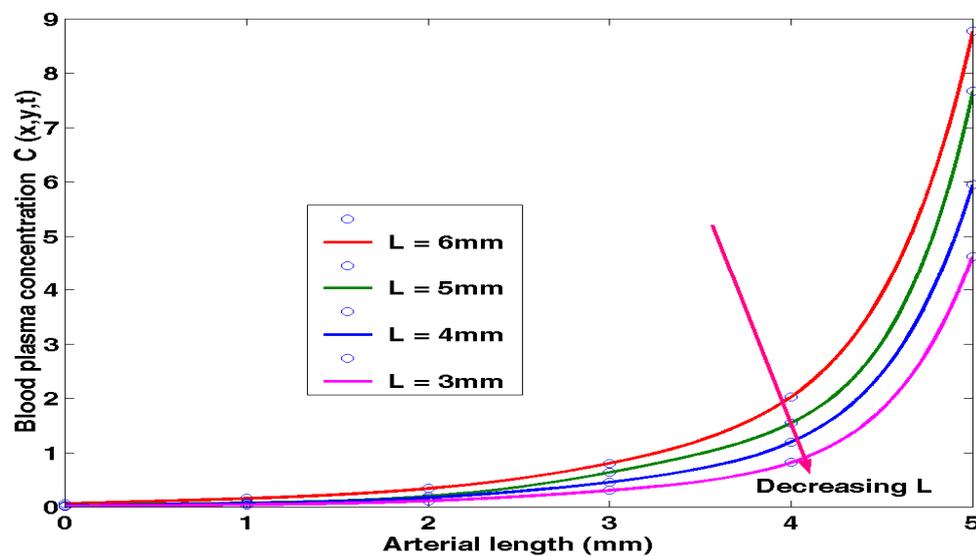


Figure 4.2. Graph of blood plasma concentration level against arterial length.

Figure 4.3 indicates that an increase in the arterial length results to a decrease in the blood plasma concentration levels.

4.3. Effects of Axial Velocity on Blood Plasma Concentration Level

Equation (3.29) was solved using MATLAB and the results of the effects of Axial Velocity (U) on blood plasma Concentration levels were recorded as shown in Table 4.3 below.

Table 4.3. Value of blood plasma Concentration level for varying axial Velocity.

Axial Velocity	Arterial length					
	0	1	2	3	4	5
U = 10 m/s	0.059564	0.155576	0.423988	0.9522211	1.9292348	5.17779
U = 20 m/s	0.027131	0.0721554	0.22961	0.6333	1.444437	4.168957
U = 30 m/s	0.023997	0.0624358	0.16972386	0.457674	1.194499	3.152
U = 40 m/s	0.0154	0.041	0.1117	0.3034	0.8177	2.5247

The above results were presented in Figure 4.3 below.

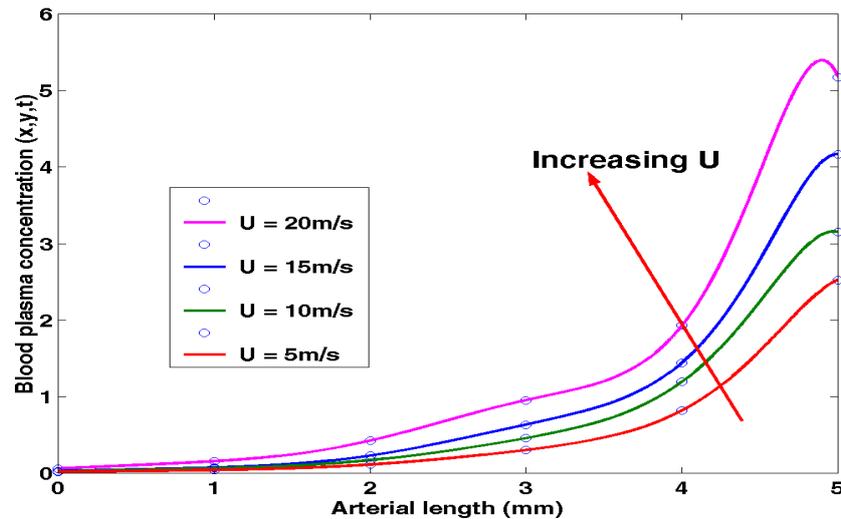


Figure 4.3. Graph of blood plasma concentration level against arterial length with varying characteristic length.

It is observed from Figure 4.3 that an increase in characteristic length tends to increase the blood plasma concentration levels. Also, an increase in the arterial length leads to increase in the blood concentration levels. The blood plasma speed is proportional to the shear rate, and the shear rate is large, and the uniform axial speeds up. Increasing the speed will increase the temperature of the blood, resulting in a decrease in the viscosity and shear stress of the blood plasma.

4.4. Effects of Viscous dissipation on Blood Temperature Distribution

The values of $v = u = 1.0 \text{ m/s}$ were held constant and φ kept varying in equation (3.16). Solving equation (3.16) for varying values of φ , the results obtained were recorded in Table 4.4 below.

Table 4.4. Blood plasma temperature distribution for varying viscous dissipation.

Viscous Dissipation	Arterial length, x				
	0	1	2	3	4
$\varphi = 5$	6.813856	5.872194	5.5395637	5.1702643	4.0835628
$\varphi = 10$	6.941472	6.021216	5.6722278	5.3011632	4.172579
$\varphi = 15$	7.069552	6.170012	5.823442	5.4426483	4.263325

The results in Table 4.4 were represented graphically as shown in Figure 4.4 below.

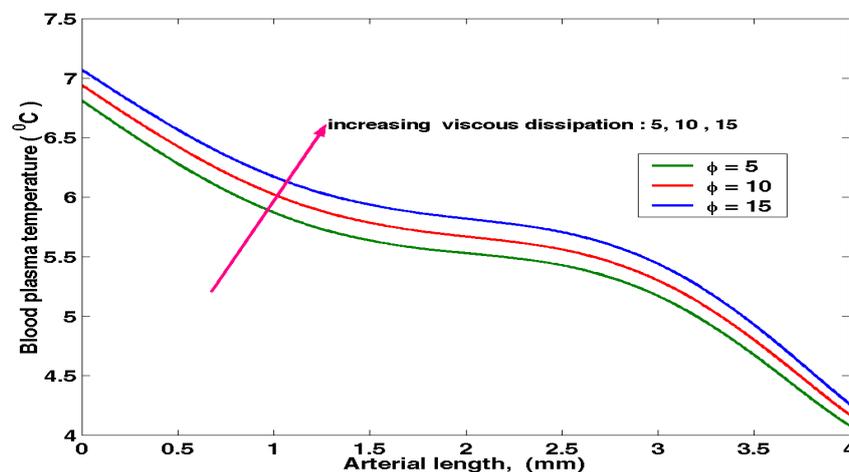


Figure 4.4. Temperature against arterial length with varying viscous dissipation.

Figure 4.4 indicates that for several values of viscous dissipation (ϕ), numerical results obtained show that the blood plasma surface heat transfer tends to decrease by increasing in ϕ .

4.5. Effects of Grashof number on blood plasma velocity

Considering equation (3.11), the values of $M = 5$, $v = u = 1.0$ m/s, were held constant while Gr were varied. Solving equation (3.11) for varying values of Gr , the solutions obtained were recorded in Table 4.5 below.

Table 4.5. Blood plasma velocity profiles for varying viscous dissipation.

Grashof number	Arterial length, x				
	0	1	2	3	4
Gr = 10	3.121122	2.252423	1.993669	1.820669	1.353298
Gr = 20	2.974905	2.101041	1.943007	1.774042	1.318601
Gr = 30	2.928688	2.049659	1.892351	1.727414	1.283908

The results in Table 4.5 were represented graphically as shown in Figure 4.5 below;

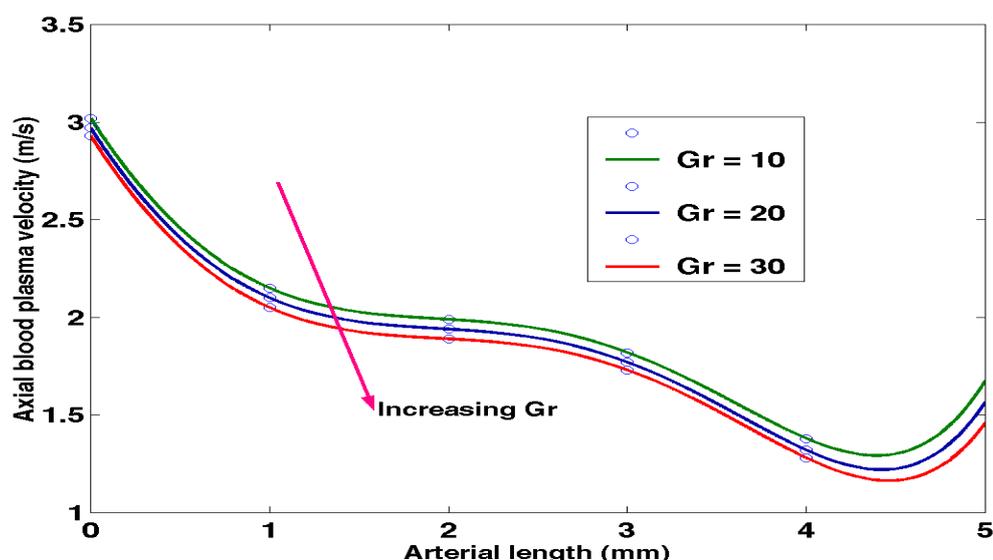
**Figure 4.5.** Blood plasma velocity against arterial length with varying Grashof number.

Figure 4.5 shows that for different values of Grashof number, numerical results for axial velocity of blood plasma tends to decrease with increase in Gr .

4.6. Effects of Magnetic Field on Blood Plasma Velocity

Equation (3.11) was solved by holding constant the values of $Gr = 10$, $v = u = 1.0$ m/s, while varying M . The results obtained were recorded in Table 4.6 below.

Table 4.6. Blood plasma velocity profiles for varying Magnetic field.

Magnetic field	Arterial length, x				
	0	1	2	3	4
M = 4	3.021122	2.152423	1.993662	1.820669	1.353295
M = 5	3.123708	2.248948	2.077204	1.88169	1.378571
M = 6	3.260543	2.378051	2.187733	1.961018	1.410966

The results in Table 4.6 were presented graphically as shown in Figure 4.6 below.

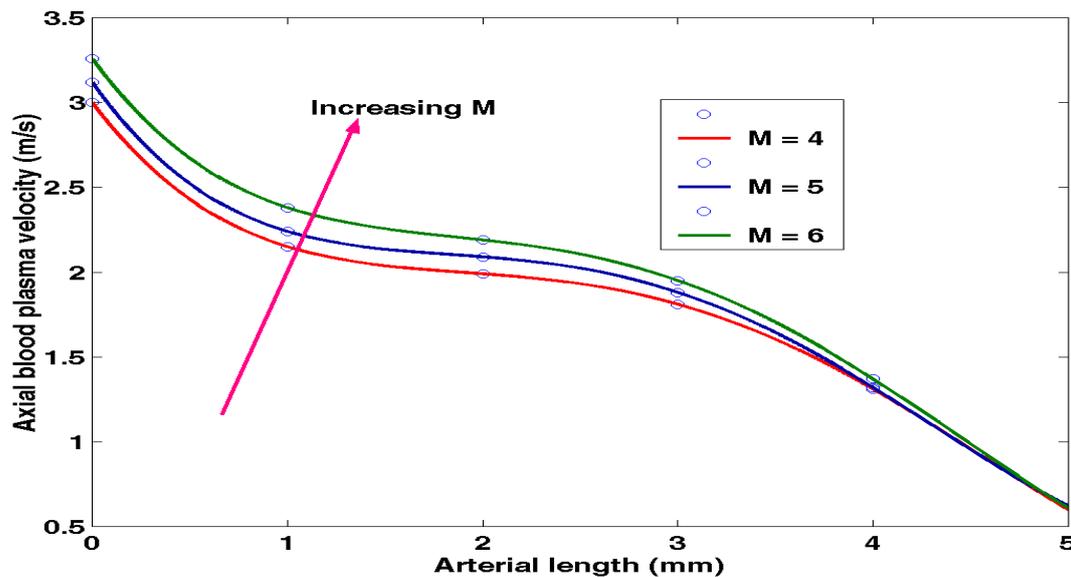


Figure 4.6. Blood plasma velocity against arterial length with varying Magnetic field.

Figure 4.6 indicates that for several values of Magnetic field, the blood plasma velocity tends to increase by increasing in M .

5.0. Conclusion

A numerical study was performed to analyze the effects of Diffusion Coefficient, Characteristic Length, and Axial Velocity on blood plasma Concentration levels; effects of Viscous dissipation on Blood Plasma Temperature Distribution; and Effects of Grashof number on blood plasma velocity.

The following outcomes were obtained from the study.

- Increase in the Diffusion Coefficient leads to an increase in the blood plasma Concentration levels.
- Decrease in Arterial Length tends to increase in blood plasma Concentration levels.
- Axial Velocity leads to a decrease in blood plasma Concentration levels.
- An increase in Viscous dissipation leads to a decrease in Blood Temperature Distribution.
- An increase in Grashof number causes an increase in blood plasma velocity.
- An increase in magnetic field leads to increase of velocity of blood plasma.

6.0. Recommendations

From the results of this study, a mathematical model in three-dimensions is recommended to more realistically present the physical dynamics of flow of blood plasma. This higher dimension will also provide additional confined parameters on the magnetic field and heat transfer affecting flow of blood plasma.

Acknowledgement: The authors acknowledge *Kisii University (Department of Mathematics and Actuarial Sciences)* for affiliation and support in academic resources.

Nomenclature

v , Velocity along y-axis (m^2); u , Velocity along x-axis (m^2); P , Pressure (Nm^{-2}); ρ , Density (Kg/m^3); μ , Viscosity, (Ns/m^2); Q_0 , Heat absorption coefficient; $u_x = \frac{\partial u}{\partial x}$; $u_t = \frac{\partial u}{\partial t}$; $u_{xx} = \frac{\partial^2 u}{\partial x^2}$; $u_{yy} = \frac{\partial^2 u}{\partial y^2}$; T ,

Temperature (K); C_p , Specific heat at constant pressure; ρg_x , External force in x direction; ρg_y , External force in y direction; φ , Viscous dissipation; Pr , Prandtl number; M , Magnetic field.

References

- Abubakar, J.U. and Adeoye, A.D., (2020) "Effects of radiative heat and magnetic field on blood flow in an inclined tapered stenosed porous artery", *Journal of taibah university for science*, **vol. 14**, NO. 1, pp. 77–86.
- Abdullah, Naser. N., Talib, A. H., and Mahali S., (2015) "Effects of magnetic field and Hall current to the blood velocity and LDL transfer", *Journal of Physic*, **vol 4**, pp. 70-78.
- Akar1,S., Abolfazli Esfahani and Seyed Ali Mousavi Shaegh (2019)," A Numerical Investigation of Magnetic Field Effect on Blood Flow as Biomagnetic Fluid in a Bend Vessel", *Journal of magnetism and magnetic materials*, **vol 3**, pp. 43-70.
- Assunta Andreozzi, Luca Brunese, Marcello Iasiello, Claudio Tucci and Giuseppe Peter Vanoli (2020), " Numerical analysis of the pulsating heat source effects in a tumor tissues", *Computer Methods and Programs in Biomedicine*, **vol 10**, pp. 1016-1056.
- Bhavya Tripathi and Bhupendra Kumar Sharma (2020) "Influence of Heat and Mass Transfer on Two-Phase Blood Flow with Joule Heating and Variable Viscosity in the Presence of Variable Magnetic Field." *International Journal of Computational Methods*, **Vol. 17**, No. 03, 1850139.
- Tashtoush Bourhan and Magableh Ahmad (2008) "Magnetic field effect on heat transfer and fluid flow characteristics of blood flow in multi-stenosis arteries", *International Journal Heat and Mass Transfer*, **vol 44**, pp. 297– 304.
- Gaurav Varshney, Katiyar, V.K., Sushil Kumar (2010) "Effect of magnetic field on the blood flow in artery having multiple stenosis: a numerical study," *International Journal of Engineering, Science and Technology*, **Vol. 2**, No. 2, pp. 67-82.
- Ilyani Abdullah, Norsarahaida Amin and Tasawar Hayat (2011) " Magnetohydrodynamic effects on blood flow through an irregular stenosis", *International journal for numerical methods in fluids*, **vol 67**, pp. 1624–1636.
- Jiangye Li, Hulin Huang (2010)," Effect of Magnetic Field on Blood Flow And Heat Transfer Through A Stenosed Artery", *International Conference on Biomedical Engineering and Informatics*, **vol 3**, pp. 2028-2032.
- Jagdish Singh and Rajbala Rathee (2010)" Analytical solution of two-dimensional model of blood flow with variable viscosity through an indented artery due to LDL effect in the presence of magnetic field" *International Journals of physical sciences*, **vol.5**, pp. 1857-1868.
- Jahangir Alam, Ghulam Murtaza, Efstratios Tzirtzilakis and Mohammad Ferdows (2021)," Bio magnetic Fluid Flow and Heat Transfer Study of Blood with Gold Nanoparticles over a Stretching Sheet in the Presence of Magnetic Dipole", *International Journals of physical sciences*, **vol 6**, pp.113-132.
- Maxwell, B.H. and Ralph Baierlein, (2000),"Electricity and magnetism", *American Journal of Physics*, **vol 2**, pp. 236-237.
- Misra J.C., Chakravarty,S., (1986) "Flow in arteries in the presence of stenosis", *Journal of Biomech*, **Vol. 19**. pp. 907–918.
- Nakamura Masahide and Sawada Tadashi (1988) "Numerical study on flow of non-Newtonian fluid through axisymmetric stenosis" *J Biomech. Eng*, **Vol. 110**, pp. 247–262.
- Om-Prakash, Singh, D.C., Devendra Kumar and Yogesh Kumar Dwivedi (2011) "A study of effects of heat source on MHD blood flow through bifurcated arteries" *Nature*, **18**, pp.67- 82.
- Phyllis Mumbi Macharia (2018), "The impact of a transverse magnetic field on blood flowing through an axisymmetric curved shaped stenotic artery", *Nature*, **vol 3**, pp. 269-289.
- Sanyal, D.C., Das, K., Debnath, S., (2009) "Heat transfer in a two-layered blood flow model in a narrow tube in presence of magnetic field", *African journal of mathematical physics*, **vol.7**, pp. 1-8.
- Shit, G. C., Sreeparna Majee (2020) "Effects of magnetic field on blood flow", *International journal of engineering, science and technology*, **vol. 9**, pp. 35-53.
- Sinha,A., Misra, J.C., Shit, G.C., (2016), "Effect of heat transfer on unsteady MHD flow of blood in a permeable vessel in the presence of non-uniform heat source," *Alexandria engineering journal*, **55**, pp. 2023-2033.
- Zigta B. (2020), "Effect of thermal radiation and chemical reaction on MHD flow of blood in stretching permeable vessel", *Int. J. of Applied Mechanics and Engineering*, **vol 23**, No. 3, pp. 198-211.

Disclaimer/Publisher's Note: The statements, opinions and data contained in all publications are solely those of the individual author(s) and contributor(s) and not of MDPI and/or the editor(s). MDPI and/or the editor(s) disclaim responsibility for any injury to people or property resulting from any ideas, methods, instructions or products referred to in the content.